

# SQFlex

Renewable-energy-based water supply systems


50/60 Hz




<b>1. Product data</b>	<b>3</b>	<b>7. Technical data</b>	<b>33</b>
Performance range	3	Dimensions and weights	33
Applications	4	Electrical data	33
SQFlex system	4	SQF pump	34
Type keys	6	CU 200 SQFlex control unit	34
Pumped liquids	6	CIU 273 SQFlex GRM control unit	35
Curve conditions	6	IO 50 SQFlex switch box	35
System overview	7	IO 101 SQFlex switch box	35
		IO 102 SQFlex breaker box	36
<b>2. Features and benefits</b>	<b>9</b>	Charge controller	36
Dry-running protection	9	Material specification, helical rotor pump	37
High efficiency	9	Material specification, centrifugal pump	38
Overvoltage and undervoltage protection	9	Material specification, motor	39
Overload protection	9		
Overtemperature protection	10	<b>8. Product numbers</b>	<b>40</b>
Maximum Power Point Tracking (MPPT)	10	SQF submersible pump	40
Wide voltage range	10	CU 200 SQFlex control unit	40
Reliability	10	CIU 273 SQFlex GRM control unit	40
Installation	10	IO 50 SQFlex switch box	40
Service	10	IO 101 SQFlex switch box	40
		IO 102 SQFlex breaker box	40
<b>3. Applications</b>	<b>11</b>	Charge controller	40
SQFlex Solar	11	Submersible drop cables	40
SQFlex Solar with CU 200 and level switch	12		
SQFlex Solar with backup generator	13	<b>9. Accessories</b>	<b>41</b>
SQFlex Solar with CU 200 and backup generator	14	Flow sleeve for SQFlex 3" standard version	
SQFlex Solar with backup batteries	15	(EN 1.4301/AISI 304)	41
SQFlex Wind	16	Flow sleeve for SQFlex 4" standard version	
SQFlex Wind with CU 200 and level switch	17	(EN 1.4301/AISI 304)	41
SQFlex Combi	18	Grease	41
SQFlex Combi with CU 200 and level switch	19	Level switch	41
SQFlex system with generator as power supply	20	Pressure switch	41
		Anemometer	41
<b>4. System components</b>	<b>21</b>	Submersible drop cable	42
SQF submersible pump	21	Cable termination kit, type KM	42
CU 200 SQFlex control unit	21	Cable clips	42
CIU 273 SQFlex GRM control unit	23	Straining wire	42
IO 50 SQFlex switch box	24	Wire clamp	42
IO 101 SQFlex switch box	24	Zinc anodes	42
IO 102 SQFlex breaker box	25	Solar cables	43
Charge controller	25		
Wind turbine	25	<b>10. Further product information</b>	<b>44</b>
Generator	25	WebCAPS	44
		WinCAPS	45
<b>5. System sizing</b>	<b>26</b>	GO CAPS	46
Sizing of SQFlex system	26		
<b>6. Performance curves</b>	<b>27</b>		
SQF 0.6-2	27		
SQF 0.6-3	27		
SQF 1.2-2	28		
SQF 1.2-3	28		
SQF 2.5-2	29		
SQF 3A-10	29		
SQF 5A-3	30		
SQF 5A-7	30		
SQF 8A-3	31		
SQF 8A-5	31		
SQF 11A-3	32		

# 1. Product data

## Performance range

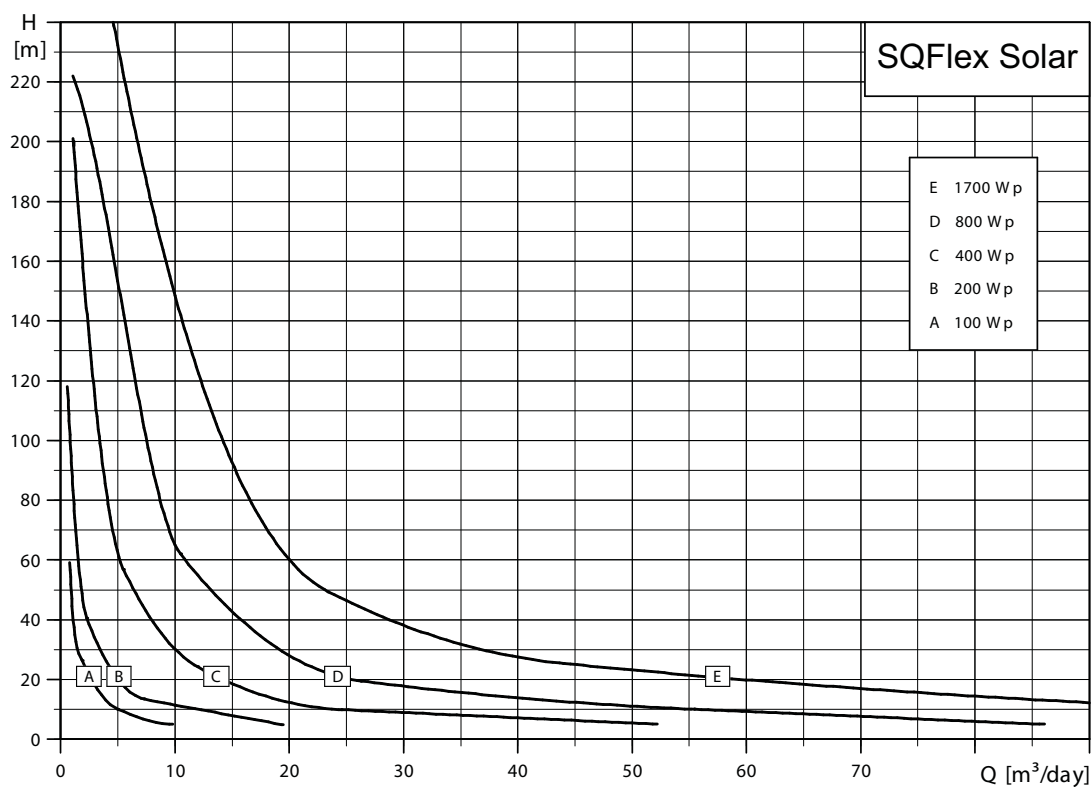

TM02 2337 2309

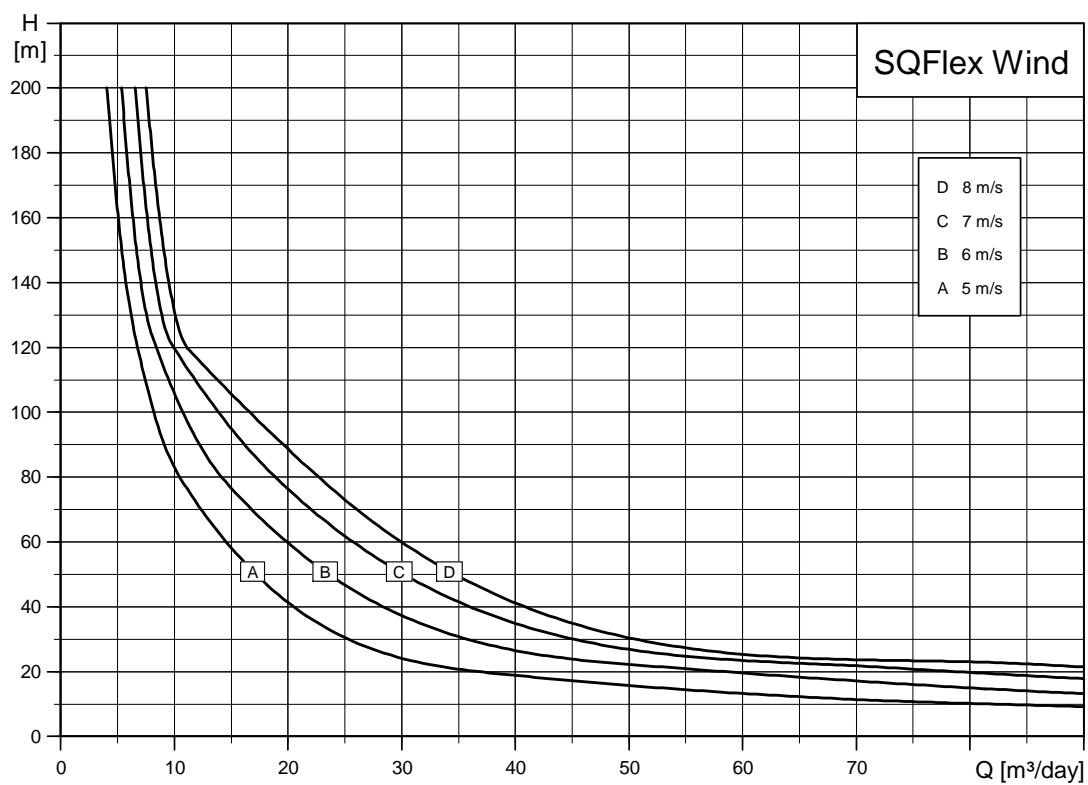

TM02 2411 2309

**Note:** The curves must not be used as guarantee curves.

## Applications

Being designed for continuous as well as intermittent operation, the SQFlex system is especially suitable for water supply applications in remote locations, such as:

- villages, schools, hospitals, single-family houses, etc.
- farms
  - watering of cattle
  - irrigation of fields and greenhouses
- game parks and game farms
  - watering applications
- conservation areas
  - pumping of surface water
- floating pump installations for pumping of water from ponds and lakes.

## SQFlex system

The SQFlex system is a reliable water supply system based on renewable energy sources, such as solar and wind energy. The SQFlex system incorporates an SQF submersible pump.

Very flexible as to its energy supply and performance, the SQFlex system can be combined and adapted to any need according to the conditions on the installation site.

The system components are:


- SQF submersible pump
- CU 200 SQFlex control unit
- CIU 273 SQFlex GRM control unit
- IO 50 SQFlex switch box
- IO 101 SQFlex switch box
- IO 102 SQFlex breaker box
- charge controller
- energy supply system:
  - solar panels
  - wind turbine
  - generator
  - batteries.

## Pump

The SQF pump range comprises two pump technologies:

- helical rotor pump (3") for high heads and small flow rates
- centrifugal pump (4") for low heads and large flow rates.

The performance curves below illustrate the pump performance of the two pump models.

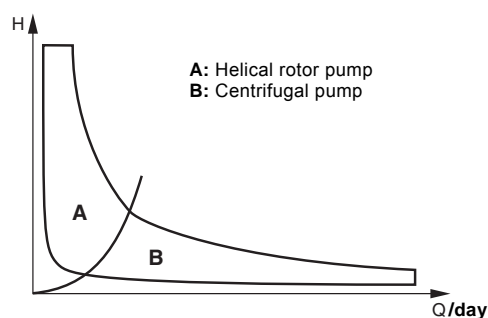

**Fig. 1** Performance ranges for helical rotor and centrifugal pumps

All pump types are available in two material variants:

- SQF is the standard version made of stainless steel DIN W.-Nr. 1.4301
- SQF-N is made of stainless steel DIN W.-Nr. 1.4401.

TM02 2425 3901

## Motor

The motor has been developed specifically for the SQFlex system and is designed according to the permanent-magnet principle with built-in electronic unit.

The SQFlex 3" motor range comprises only one motor size, the MSF 3 with a maximum power input (P1) of 1400 W.

The motor speed range is 500-3600 min<sup>-1</sup>, depending on power input and load.

The motor is available in two material variants:

- MSF 3 is the standard version made of stainless steel DIN W.-Nr. 1.4301.
- MSF 3 N is made of stainless steel DIN W.-Nr. 1.4401.

The motor has three internal limitations:

- maximum power input (P1) of 1400 W
- maximum current of 8.4 A
- maximum speed of 3600 min<sup>-1</sup>.

The pump delivers its maximum performance when one of the above limitations is reached.

## Supply voltage

Flexible as regards power supply and power range, the motor can be supplied with either DC or AC voltage:

- 30-300 VDC, PE
- 1 x 90-240 V - 10 %/+ 6 %, 50/60 Hz, PE.

## CU 200 SQFlex control unit

The CU 200 is a combined status and control unit for the SQFlex system. Moreover, the CU 200 enables connection of a level switch placed in a water reservoir or tank.

## CIU 273 SQFlex GRM control unit

The CIU 273 SQFlex is designed to work directly with the SQFlex pump and enables monitoring the system operation anywhere in the world through Grundfos Remote Monitoring. Moreover, the CIU 273 enables connection of a start/stop switch, level switch and pulsating water meter.

## IO 50 SQFlex switch box

The IO 50 is an on/off switch box designed for switching the system power supply on and off.

## IO 101 SQFlex switch box

The IO 101 is an on/off switch box designed for switching the system power supply on and off.

The IO 101 is used in solar-powered SQFlex systems with a backup generator.

## IO 102 SQFlex breaker box

The IO 102 is an on/off breaker box designed for switching the system power supply on and off.

The IO 102 is used in wind-powered SQFlex systems or wind- and solar-powered SQFlex systems.

The IO 102 makes it possible to slow down or stop the wind turbine.

## Charge controller

The charge controller is used when a battery backup system is installed with an SQFlex pumping system.

## Solar modules

Grundfos' solar modules have been developed specifically for the SQFlex system. The solar modules are equipped with plugs and sockets enabling easy connection in parallel.

The number of solar modules required depends on these factors:

- quantity of water required
- head required
- installation location.

For further information on solar modules, please contact your local Grundfos company.

## Generator

In case the power supply from its primary source of energy is temporarily insufficient, the SQFlex system can be powered by a diesel- or petrol-driven generator.

## Batteries

The SQFlex system can be powered by batteries with a voltage supply of 30-300 VDC and a maximum current of 8.4 A.

## Type keys

### Helical rotor pumps

Example	SQF	1.2	-2	x
Type range				
Rated flow rate [m <sup>3</sup> /h] at 3000 min <sup>-1</sup>				
Number of stages				
Blank = Stainless steel DIN W.-Nr. 1.4301				
N = Stainless steel DIN W.-Nr. 1.4401				

### Centrifugal pumps

Example	SQF	5A	-3	x
Type range				
Rated flow rate [m <sup>3</sup> /h] and pump generation				
Number of stages				
Blank = Stainless steel DIN W.-Nr. 1.4301				
N = Stainless steel DIN W.-Nr. 1.4401				

## Pumped liquids

SQF pumps are applicable in thin, clean, non-aggressive, non-explosive liquids, not containing solid or long-fibred particles larger than sand grains.

pH value: 5 to 9.

Liquid temperature: 0 °C to +40 °C.

The pump can run at free convection (~ 0 m/s) at maximum +40 °C.

### Sand content

Maximum sand content: 50 g/m<sup>3</sup>.

A higher sand content will reduce the pump life considerably due to wear.

### Salt content

The table below shows the resistance of stainless steel to Cl<sup>-</sup>. The values in the table are based on a pumped liquid with a pH value of 5 to 9.

Stainless steel DIN W.-Nr.	Cl <sup>-</sup> content [ppm]	Liquid temperature [°C]
1.4301	0-300	< 40
	300-500	< 30
1.4401	0-500	< 40

For additional protection, for instance if the Cl<sup>-</sup> content exceeds 500 ppm, zinc anodes can be used.

See section *Zinc anodes* on page 42.

## Curve conditions

### Performance range, SQFlex Solar

The SQFlex Solar performance range on page 3 is based on these data:

- solar radiation on a tilted surface (tilt angle of 20 °)
- H<sub>T</sub> = 6 kWh/m<sup>2</sup> per day
- ambient temperature: +30 °C
- 20 ° northern latitude.

### Performance range, SQFlex Wind

The SQFlex Wind performance range on page 3 is based on these data:

- average wind speed, measured over one month
- calculations according to Weibull's factor k = 2
- continuous operation over 24 hours.

### Specific performance charts

The specific performance charts on pages 26 to 31 are based on the following guidelines:

- All curves show mean values.
- The curves must not be used as guarantee curves.
- Typical deviation: ± 15 %.
- The measurements have been made at a water temperature of +20 °C.
- The curves apply to a kinematic viscosity of 1 mm<sup>2</sup>/s (1 cSt). If the pump is used for liquids with a viscosity higher than that of water, this will reduce the head and increase the power consumption.














































### Pressure loss

The QH curves are inclusive of inlet and valve losses at actual speed.



## System overview

The SQFlex system can be used in a number of combinations as shown in the table below.

System	System components							
	Pump	Solar panels★	Wind turbine	Generator/battery	Charge controller	Switch box or breaker box	Control unit	Optional extras
<b>SQFlex Solar</b> See page 10.								
						IO 50		
<b>SQFlex Solar with CU 200 and level switch</b> See page 11.								
							CU 200	(★★)
<b>SQFlex Solar with backup generator</b> See page 12.								
						IO 101		
<b>SQFlex Solar with CU 200 and backup generator</b> See page 13.								
						IO 101	CU 200	(★★)
<b>SQFlex Solar with backup batteries</b> See page 14.								 Pressure tank
						IO 50 or IO 101 (★★)	CU 200	 Pressure switch
<b>SQFlex Wind</b> See page 15.								
						IO 102		
<b>SQFlex Wind with CU 200 and level switch</b> See page 16.								
						IO 102	CU 200	(★★)
<b>SQFlex Combi</b> See page 17.								
						IO 102		
<b>SQFlex Combi with CU 200 and level switch</b> See page 18.								
						IO 102	CU 200	(★★)
<b>SQFlex system with generator as power supply</b> See page 19.								
						IO 101		

★ For number of solar panels required, please consult the sizing tool in Grundfos WebCAPS or WinCAPS.

★★ Optional.

## 2. Features and benefits

### Dry-running protection

The SQF pump is protected against dry running in order to prevent damage to the pump. The dry-running protection is activated by a water level electrode placed on the motor cable 0.3 to 0.6 m above the pump, depending on pump type.

The water level electrode measures the contact resistance to the motor sleeve through the water. When the water level falls below the water level electrode, the pump will be cut out. The pump will automatically cut in again five minutes after the water level is above the water level electrode.

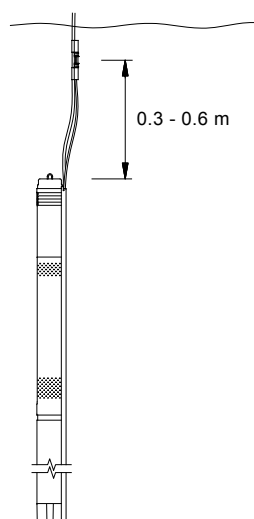


Fig. 2 Vertical installation

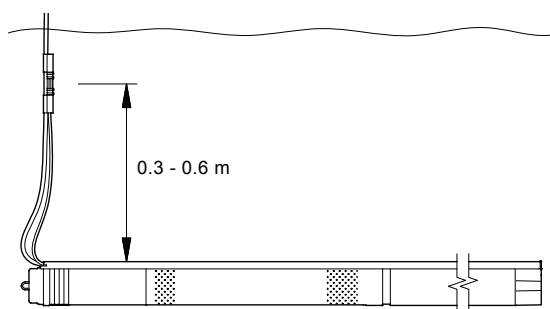


Fig. 3 Horizontal installation

### High efficiency

The MSF 3 motor is a permanent-magnet motor (PM motor) featuring a higher efficiency within the power range compared to a conventional asynchronous motor.

In addition to this, the segmented motor stator contributes considerably to the high efficiency.

The MSF 3 motor is furthermore characterised by a high locked-rotor torque even at low power supply.

### Overvoltage and undervoltage protection

Overvoltage and undervoltage may occur in case of unstable power supply or a faulty installation.

The pump will be cut out if the voltage falls outside the permissible voltage range. The motor is automatically cut in when the voltage is again within the permissible voltage range. Therefore no extra protection relay is needed.

**Note:** The MSF 3 motor is protected against transients from the power supply according to EN/IEC 61000-4-5 (6 kV). In areas with high lightning intensity, we recommend external lightning protection.

### Overload protection

In case the upper load limit is exceeded, the motor will automatically compensate for this by reducing the speed. If the speed falls below  $500 \text{ min}^{-1}$ , the motor will be cut out automatically.

The motor will remain cut out for 30 seconds after which period the pump will automatically attempt to restart.

The overload protection prevents burnout of the motor. Consequently, no extra motor protection is required.

TM02 2436 3901

TM02 2435 3901



## Overtemperature protection

A permanent-magnet motor gives off very little heat to its surroundings. In combination with an efficient internal circulation system leading the heat away from the rotor, stator and bearings, this fact ensures optimum operating conditions for the motor.

As an extra protection, the electronic unit has a built-in temperature sensor. When the temperature rises above +85 °C, the motor is automatically cut out. When the temperature has dropped to +75 °C, the motor is automatically cut in again.

## Maximum Power Point Tracking (MPPT)

The built-in electronic unit gives the SQFlex system a number of advantages compared to conventional products. One of these advantages is the built-in microprocessor with MPPT (Maximum Power Point Tracking).

Thanks to the MPPT function, the pump duty point is continuously optimised according to the input power available. MPPT is only available for pumps connected to DC supply.

## Wide voltage range

The wide voltage range enables the motor to operate at any voltage from 30-300 VDC or 90-240 VAC. This makes installation and sizing especially easy.

## Reliability

The MSF 3 motor has been developed with a view to high reliability which is achieved through the following features:


- carbon/ceramic bearings
- excellent starting capabilities
- various protection facilities.

## Installation

The following features ensure simple installation of the SQF pump:


- Low weight ensuring user-friendly handling.
- Installation in 3", 4" or larger boreholes.
- Only an on/off switch is needed, which means that no extra motor starter/starter box is necessary.
- SQF is available with cable and socket.

**Note:** Horizontal installation requires the water level electrode to be placed minimum 0.3 to 0.6 m above the pump to ensure the dry-running protection.

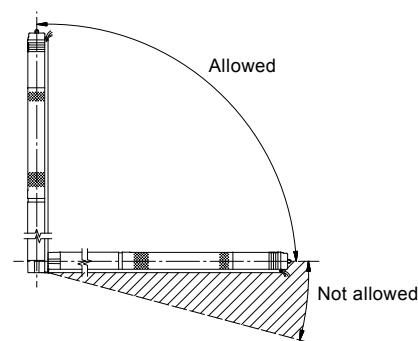

TM02 2246 3901

Fig. 4 Installation of SQF pumps

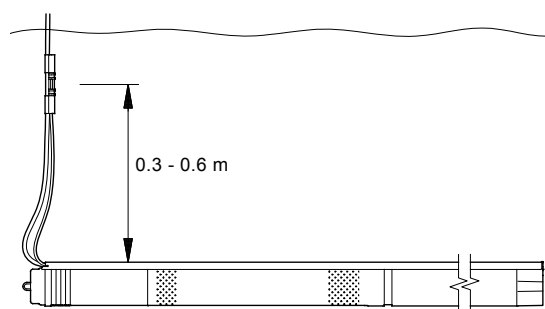

TM02 2435 3901

Fig. 5 Horizontal installation

## Service

The modular pump and motor design facilitates installation and service. The cable and the end cover with socket are fitted to the pump with screws to enable replacement.

## 3. Applications

### SQFlex Solar

The SQFlex solar system is the simplest of the range of SQFlex systems.

#### Benefits

The protective circuit incorporated in the motor electronic unit cuts out the pump in case of dry running or similar situations.

By using the IO 50, the power supply to the pump can be switched off manually, for example in these cases:

- There is no need for water supply.
- The system requires service.

Other benefits:

- easy installation
- maintenance confined to periodic cleaning of the solar panels
- few and simple components.

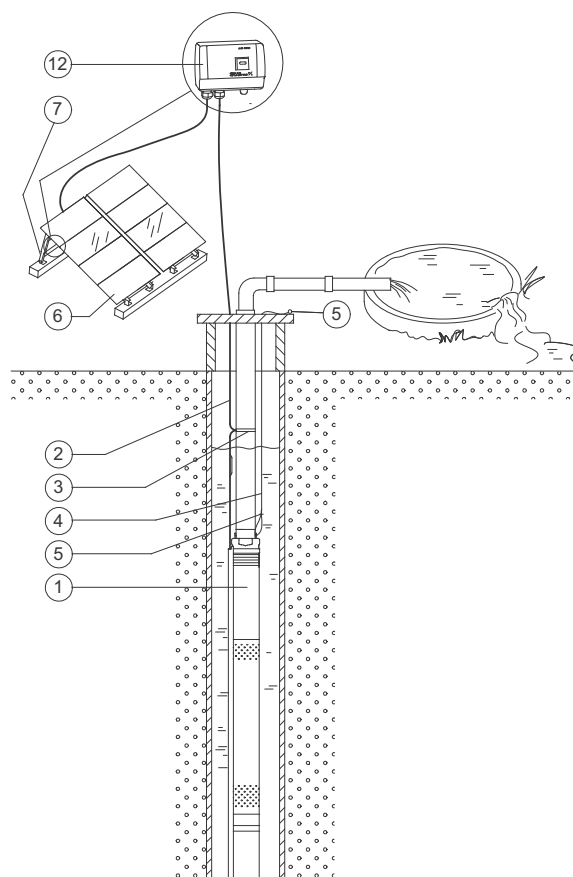


Fig. 6 SQFlex Solar

Pos.	Description
1	SQF pump
2	Submersible drop cable
3	Cable clips
4	Straining wire
5	Wire clamps
6	Solar panels
7	Support structure
12	IO 50 SQFlex switch box

**Note:** For the number of solar panels required, please consult the sizing tool in Grundfos WebCAPS or WinCAPS.

TM02 2304 1013

## SQFlex Solar with CU 200 and level switch

The SQFlex Solar system allows solar energy to be stored as water in a reservoir.

SQFlex Solar systems with a water reservoir are used in cases such as:

- There is a need for water supply at night.
- For short periods, the solar energy is insufficient to run the pump.
- There is a need for a backup water source.

### Benefits

Combined with the CU 200, the level switch acts as a pump cut-out function when the water reservoir is full.

The CU 200 offers indication of status:


- full water reservoir (level switch activated)
- pump operation
- input power.

The CU 200 indicates operational stoppage these cases:

- dry running
- service (see page 20)
- insufficient energy supply.

Other benefits:

- easy installation
- maintenance confined to periodic cleaning of the solar panels
- few and simple components.

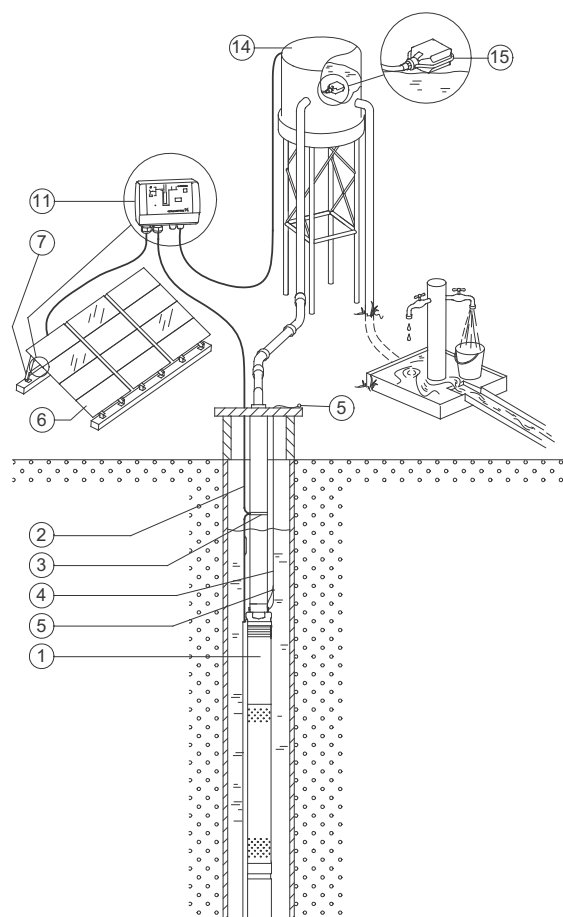

TM02 2305 1013

Fig. 7 SQFlex Solar with CU 200 and level switch

Pos.	Description
1	SQF pump
2	Submersible drop cable
3	Cable clips
4	Straining wire
5	Wire clamps
6	Solar panels
7	Support structure
11	CU 200 SQFlex control unit
14	Water reservoir
15	Level switch

**Note:** For the number of solar panels required, please consult the sizing tool in Grundfos WebCAPS or WinCAPS.

## SQFlex Solar with backup generator

During periods of limited solar energy, the SQFlex Solar system provides reliable water supply.

The system is connected to an external backup generator via the IO 101.

The system switches automatically to operation via generator when the generator is started.


If the generator is stopped manually or runs out of fuel, the IO 101 will automatically change back to operation via solar energy.

### Benefits

The system offers water supply during the night or during periods of insufficient solar energy.

Other benefits:

- easy installation
- maintenance confined to periodic cleaning of the solar panels
- few and simple components
- flexibility in terms of energy supply.

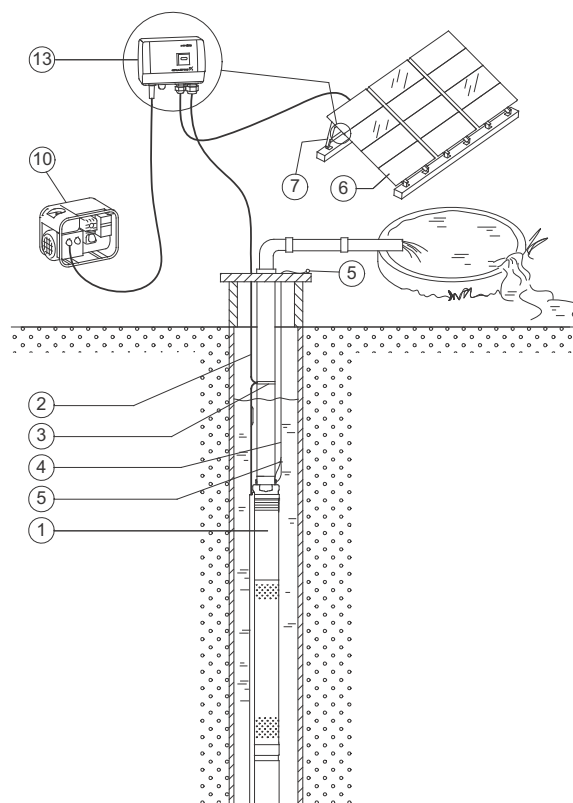

TM02 2309 1013

Fig. 8 SQFlex Solar with backup generator

Pos.	Description
1	SQF pump
2	Submersible drop cable
3	Cable clips
4	Straining wire
5	Wire clamps
6	Solar panels
7	Support structure
10	Diesel- or petrol-driven generator
13	IO 101 SQFlex switch box

**Note:** For the number of solar panels required, please consult the sizing tool in Grundfos WebCAPS or WinCAPS.

## SQFlex Solar with CU 200 and backup generator

During periods of limited solar energy, the SQFlex Solar system provides reliable water supply.

The supply of water is ensured by a diesel- or petrol-driven generator connected to the system via the IO 101.

The system switches automatically to operation via generator when the generator is started.


If the generator is stopped manually or runs out of fuel, the IO 101 will automatically change back to operation via solar energy.

### Benefits

The system offers water supply during the night or during periods of insufficient solar energy.

Other benefits:

- easy installation
- maintenance confined to periodic cleaning of the solar panels
- few and simple components
- flexibility in terms of energy supply.

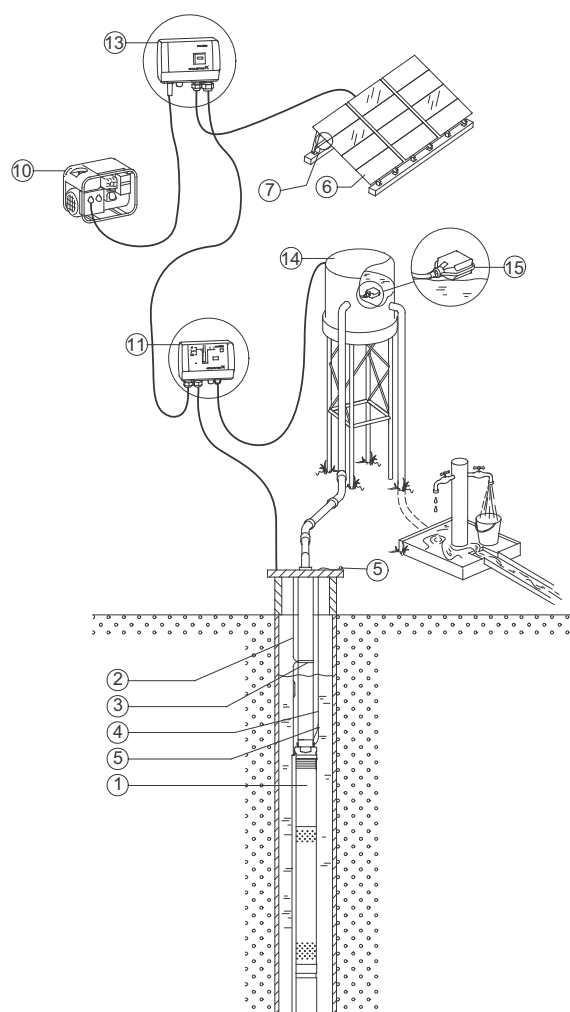

TM03 5497 1013

**Fig. 9** SQFlex Solar with CU 200 and backup generator

Pos.	Description
1	SQF pump
2	Submersible drop cable
3	Cable clips
4	Straining wire
5	Wire clamps
6	Solar panels
7	Support structure
10	Diesel- or petrol-driven generator
11	CU 200 SQFlex control unit
13	IO 101 SQFlex switch box
14	Water reservoir
15	Level switch

**Note:** For the number of solar panels required, please consult the sizing tool in Grundfos WebCAPS or WinCAPS.

## SQFlex Solar with backup batteries

During periods of limited solar energy, the SQFlex Solar system provides reliable water supply.

The supply of water is ensured by backup batteries connected to the system via the charge controller.

The system is connected as shown in fig. 10.

- Power will be provided by the solar panels wired to produce minimum 60 VDC and maximum 110 VDC.
- Power from the solar panels will be fed into a 48 VDC charge controller, which will regulate the current fed to the batteries.
- From the charge controller, power passes into the battery bank, which consists of the number of appropriately sized batteries, wired in series to achieve 48 VDC (rated) output.
- Power is drawn from the battery bank and routed through a CU 200.

**Option:** An IO 50 or IO 101 is to be installed to enable disconnection of the DC voltage. If an IO 101 is installed, it is possible to add a generator to the system.

- Power is run from the CU 200 to the SQFlex pump.

### Benefits

The system offers water supply during the night or during periods of insufficient solar energy.

Other benefits:

- easy installation
- maintenance confined to periodic cleaning of the solar panels
- few and simple components
- flexibility in terms of energy supply.

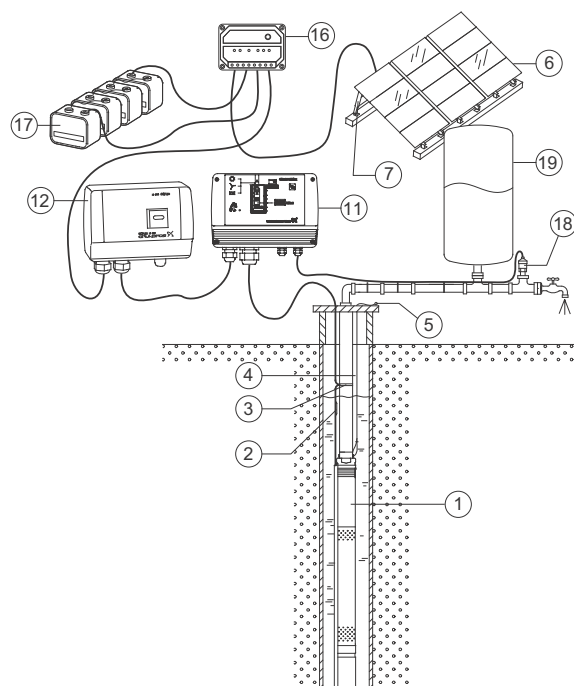


Fig. 10 SQFlex Solar with backup batteries

Pos.	Description
1	SQF pump
2	Submersible drop cable
3	Cable clips
4	Straining wire
5	Wire clamps
6	Solar panels
7	Support structure
11	CU 200 SQFlex control unit
12	IO 101 SQFlex switch box (optional)
16	Charge controller
17	Batteries
18	Pressure switch
19	Pressure tank

**Note:** For the number of solar panels required, please consult the sizing tool in Grundfos WebCAPS or WinCAPS.

TM03 4232 1013



## SQFlex Wind

The SQFlex Wind system is based on wind energy as the only energy source for pump operation.

The system is suitable for installation in areas where the wind is almost constant seen over a period of time.

As the turbine noise level increases with the wind speed, we do not recommend to install the wind turbine near a residence.


### Benefits

The IO 102 makes it possible to slow down or stop the wind turbine in these cases:

- There is no need for water supply.
- The system requires service.

Other benefits:

- easy installation
- a minimum of maintenance
- few and simple components.

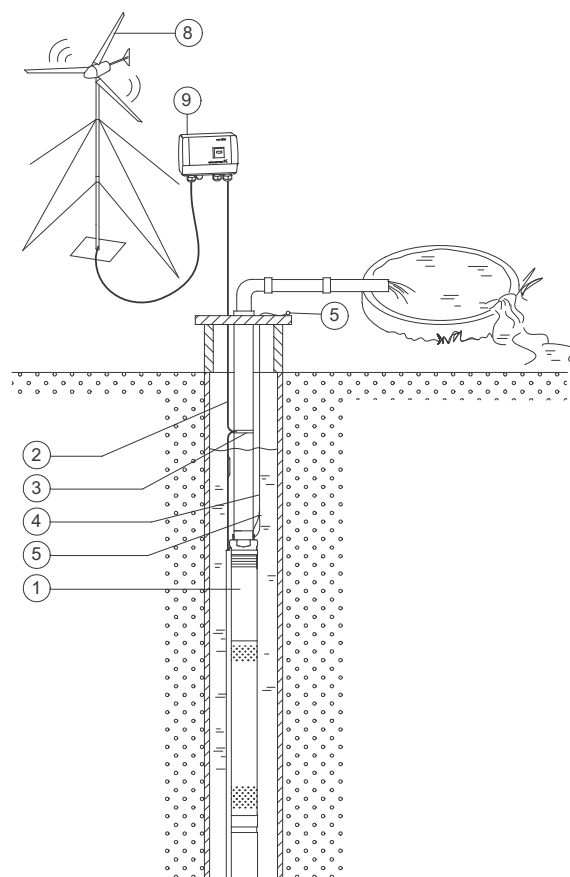

TM02 2306 1013

Fig. 11 SQFlex Wind

Pos.	Description
1	SQF pump
2	Submersible drop cable
3	Cable clips
4	Straining wire
5	Wire clamps
8	Wind turbine
9	IO 102 SQFlex breaker box

## SQFlex Wind with CU 200 and level switch

The SQFlex Wind system allows wind energy to be stored as water in a reservoir.

SQFlex Wind systems with a water reservoir are used in these cases:

- For short periods, the wind energy is insufficient to run the pump.
- There is a need for a backup water source.

As the turbine noise level increases with the wind speed, we do not recommend to install the wind turbine near a residence.

### Benefits

Combined with the CU 200, the level switch acts as a pump cut-out function when the water reservoir is full.

The CU 200 offers indication of status:

- full water reservoir (level switch activated)
- pump operation
- input power.

The CU 200 indicates operational stoppage in these cases:

- dry running
- service (see page 20)
- insufficient energy supply.

The IO 102 makes it possible to switch off the power supply in the system and to slow down or stop the wind turbine in these cases:

- There is no need for water supply.
- The system requires service.

Other benefits:

- easy installation
- a minimum of maintenance
- few and simple components.

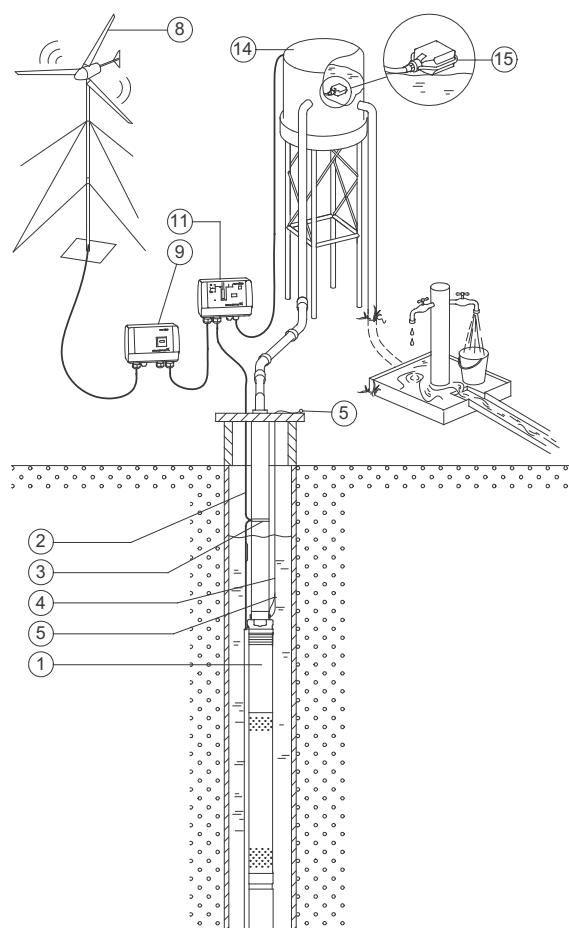


Fig. 12 SQFlex Wind with CU 200 and level switch

Pos.	Description
1	SQF pump
2	Submersible drop cable
3	Cable clips
4	Straining wire
5	Wire clamps
8	Wind turbine
9	IO 102 SQFlex breaker box
11	CU 200 SQFlex control unit
14	Water reservoir
15	Level switch

TM02 2308 1013

## SQFlex Combi

The SQFlex Combi system is ideal in areas where the solar and/or wind energy is sufficient to run the pump. The energy supply to the pump is a combination of solar and wind energy.

As the turbine noise level increases with the wind speed, we do not recommend to install the wind turbine near a residence.

### Benefits


The system offers water supply during the night or during periods of insufficient solar energy.

The IO 102 makes it possible to switch off the power supply in the system and to slow down or stop the wind turbine in these cases:

- There is no need for water supply.
- The system requires service.

Other benefits:

- easy installation
- a minimum of maintenance
- few and simple components.

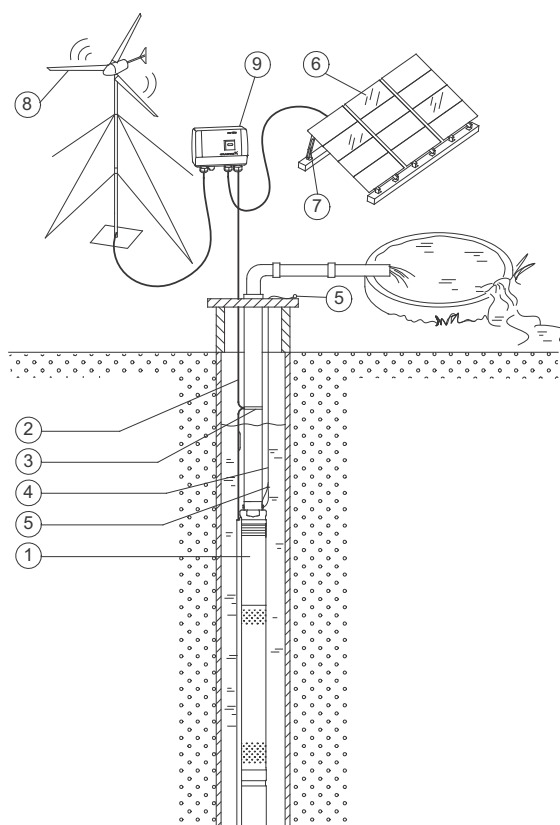

TM02 2307 1013

**Fig. 13** SQFlex Combi - combination of solar and wind energy

Pos.	Description
1	SQF pump
2	Submersible drop cable
3	Cable clips
4	Straining wire
5	Wire clamps
6	Solar panels
7	Support structure
8	Wind turbine
9	IO 102 SQFlex breaker box

**Note:** For the number of solar panels required, please consult the sizing tool in Grundfos WebCAPS or WinCAPS.

## SQFlex Combi with CU 200 and level switch

The SQFlex Combi system allows solar and wind energy to be stored as water in a reservoir.

SQFlex Combi systems with a water reservoir are used in these cases:

- For short periods, the solar or wind energy is insufficient to run the pump.
- There is a need for a backup water source.

As the turbine noise level increases with the wind speed, we do not recommend to install the wind turbine near a residence.

### Benefits

Combined with the CU 200, the level switch acts as a pump cut-out function when the water reservoir is full.

The CU 200 offers indication of status:

- full water reservoir (level switch activated)
- pump operation
- input power.

The CU 200 indicates operational stoppage in these cases:


- dry running
- service (see page 20)
- insufficient energy supply.

The IO 102 makes it possible to switch off the power supply in the system and to slow down or stop the wind turbine in these cases:

- There is no need for water supply.
- The system requires service.

Other benefits:

- easy installation
- a minimum of maintenance
- few and simple components.

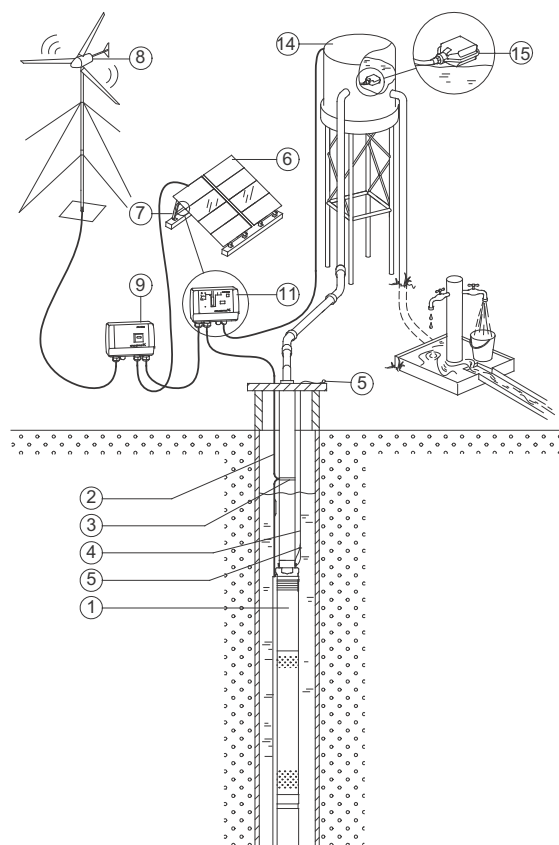

TM02 23 10 1013

Fig. 14 SQFlex Combi with CU 200 and level switch

Pos.	Description
1	SQF pump
2	Submersible drop cable
3	Cable clips
4	Straining wire
5	Wire clamps
6	Solar panels
7	Support structure
8	Wind turbine
9	IO 102 SQFlex breaker box
11	CU 200 SQFlex control unit
14	Water reservoir
15	Level switch

**Note:** For the number of solar panels required, please consult the sizing tool in Grundfos WebCAPS or WinCAPS.

## SQFlex system with generator as power supply


The SQFlex system is connected to a diesel- or petrol-driven generator.

### Benefits

The system offers water supply 24 hours a day, independently of the weather.

Other benefits:

- easy installation
- a minimum of maintenance
- few and simple components.

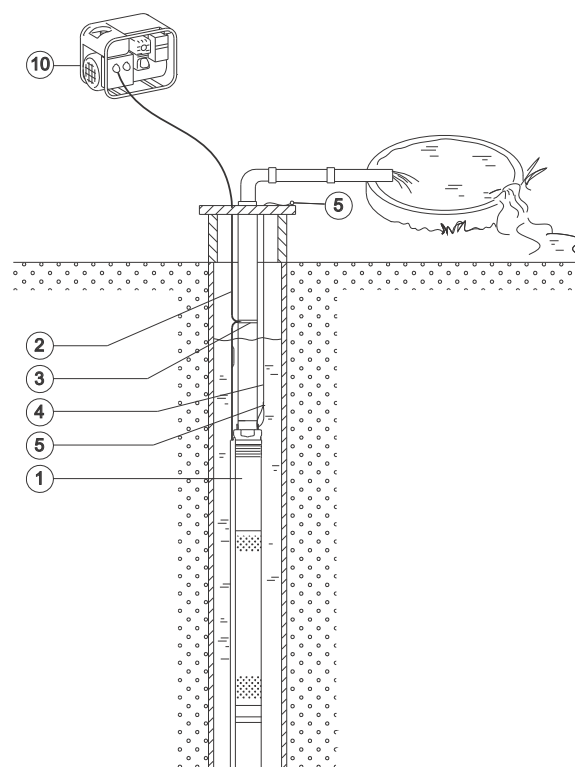

TM02 2311 1013

Fig. 15 SQFlex system with generator as power supply


Pos.	Description
1	SQF pump
2	Submersible drop cable
3	Cable clips
4	Straining wire
5	Wire clamps
10	Generator

## 4. System components

### SQF submersible pump

The SQF pump is available as a complete unit only. The complete SQF pump consists of these components:

- motor
- 2.0 m cable with water-level electrode and socket
- cable guard.




TM02 2217 3901

Fig. 16 SQF pump

The MSF motor is to be connected to the power supply as shown in fig. 17.

As the integrated electronic unit enables the motor to handle both DC and AC supply voltages, it makes no difference how the wires "+" and "-" or "N" and "L" are connected.

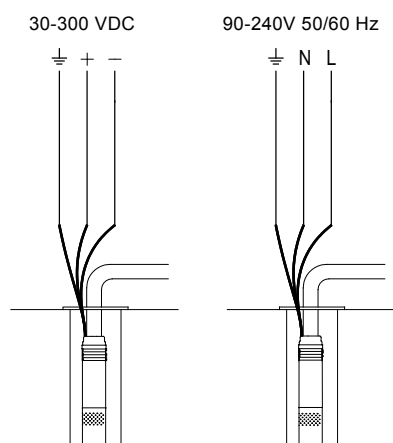

TM02 2437 3901

Fig. 17 Wiring diagram

### CU 200 SQFlex control unit

The CU 200 is a combined status, control and communication unit especially developed for the SQFlex system. The CU 200 also enables connection of a level switch.

The CU 200 incorporates cable entries for these connections:

- power supply (pos. 6)
- pump (pos. 7)
- earth (pos. 8)
- level switch (pos. 9).

The position numbers in brackets refer to fig. 18.

Communication between the CU 200 and the pump takes place via the pump power supply cable. This is called mains-borne signalling (or power line communication), and this principle means that no extra cables between the CU 200 and the pump are required.

It is possible to start, stop and reset the pump with the on/off button (pos. 1).

The CU 200 offers system monitoring and alarm indication.


The following indications allow the operation of the pump to be monitored:

- Water reservoir is full (level switch) (pos. 2).
- Pump is running (pos. 3).
- Input power (pos. 11).

The CU 200 offers the following alarm indications:


- dry running (pos. 10)
- service needed (pos. 5):
  - no contact to pump
  - overvoltage
  - overtemperature
  - overload.

In addition, the CU 200 shows the symbols of the energy supply options (pos. 4).

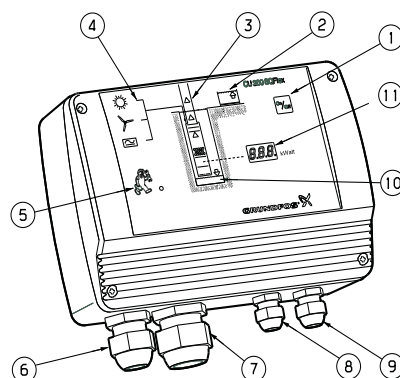

TM02 2325 1206

Fig. 18 CU 200 elements

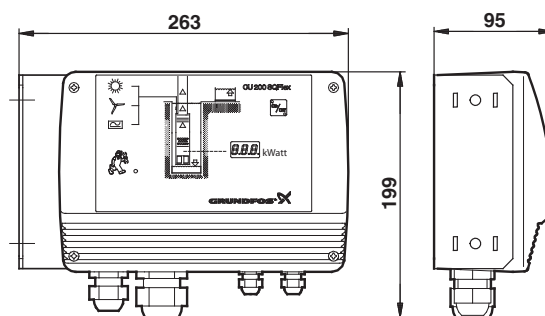


Dimensions stated in mm.

Fig. 19 Dimensions, CU 200

TM02 2323 1206



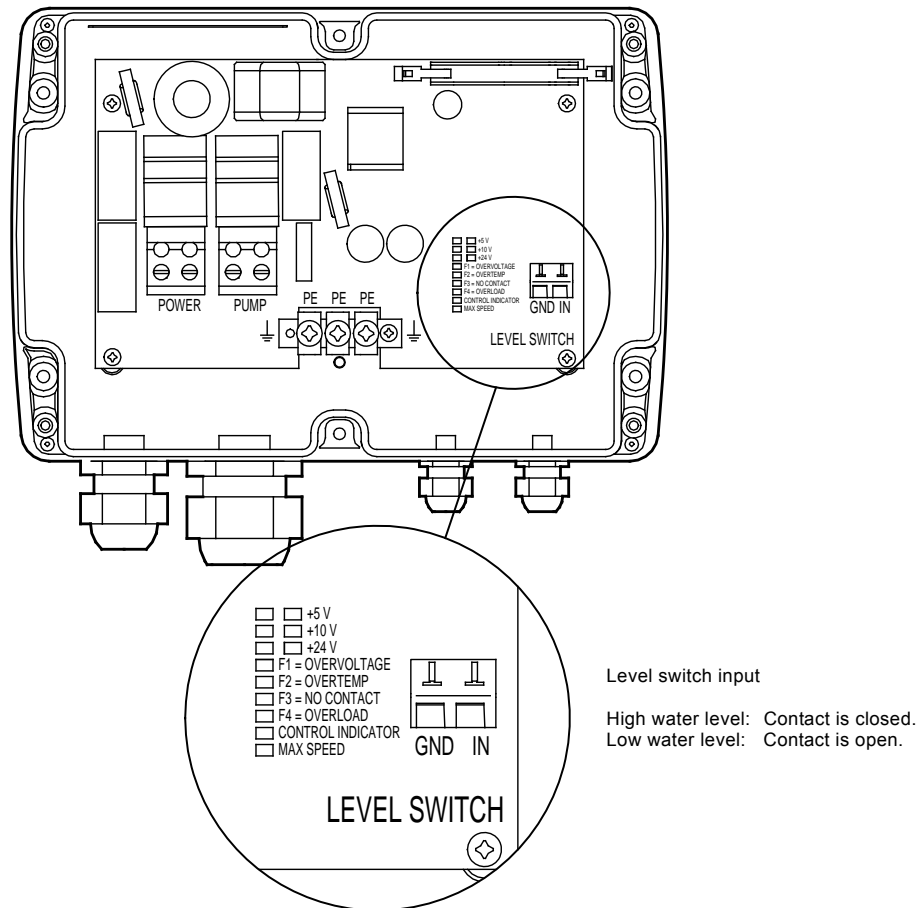


TM02 2515 4401

Fig. 20 Electrical connections, CU 200

## CIU 273 SQFlex GRM control unit

The CIU 273 SQFlex is designed to work directly with the SQFlex pump and is a combined monitoring, control and communication unit for the SQFlex pump. CIU 273 enables monitoring the system operation anywhere in the world through Grundfos Remote Monitoring. Moreover, the CIU 273 enables connection of a start/stop switch, level switch and pulsating water meter.

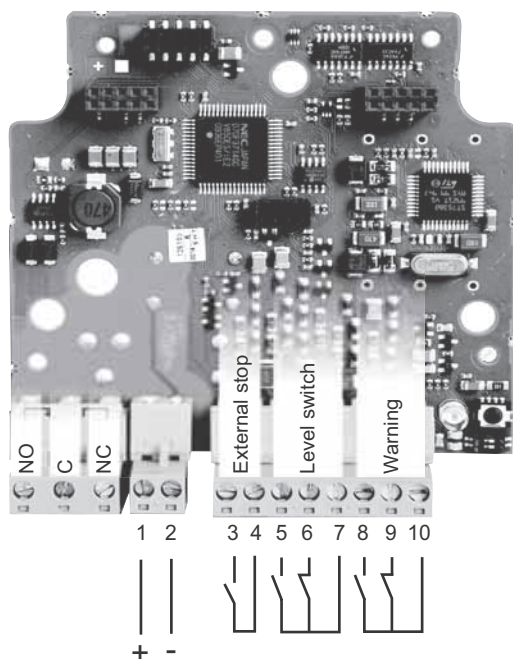

**Fig. 21** Electrical connections, CIU 273

Communication between the CIU 273 and the SQFlex pump takes place via the pump power supply cable. This is called mains-borne signalling (or power line communication), and this principle means that no extra cables between the CIU 273 and the pump are required.

It is possible to start, stop and reset the pump with the start/stop switch.

The CIU 273 offers system monitoring and alarm indication.

The following indications allow the operation of the pump to be monitored:

- Water reservoir is full (level switch).
- Pump is running.

The CIU 273 offers the following alarm indications:

- dry running
- no contact to pump
- overvoltage
- overtemperature
- overload.

**Note**

**CIU 273 can replace CU 200 in the installation.**



Dimensions stated in mm.

**Fig. 22** Dimensions, CIU 273


TM05 6101 4512

TM 05 6100 4512

## IO 50 SQFlex switch box


The IO 50 is designed specifically for solar-powered SQFlex systems.

The IO 50 enables manual starting and stopping of the pump in an SQFlex Solar system and functions as a connection box joining all necessary cables.

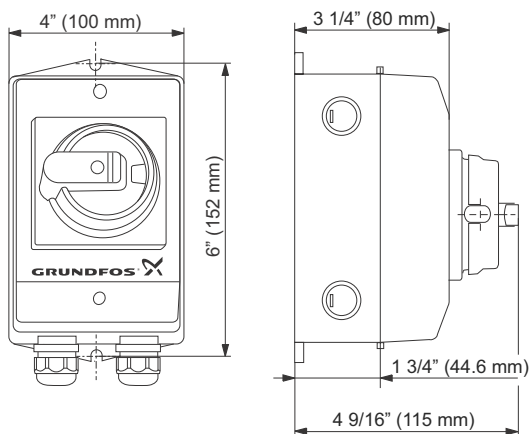

TM05 5816 2712

**Fig. 23** Dimensions, IO 50

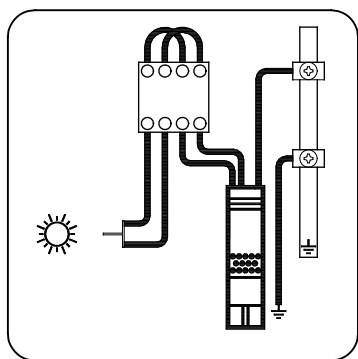

TM02 4058 4701

**Fig. 24** Wiring diagram, IO 50


## IO 101 SQFlex switch box

The IO 101 is designed specifically for solar-powered SQFlex systems.

The IO 101 enables the connection of a backup generator in case of insufficient solar energy. The switching between solar power and generator must be made manually.

In case the generator is stopped manually or runs out of fuel, the IO 101 will automatically change over to the solar panels.


The IO 101 functions as a connection box joining all necessary cables.

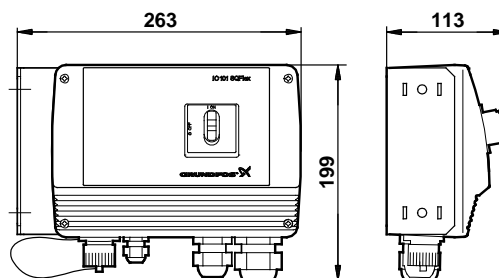

Dimensions stated in mm.

**Fig. 25** Dimensions, IO 101

TM02 2546 4003

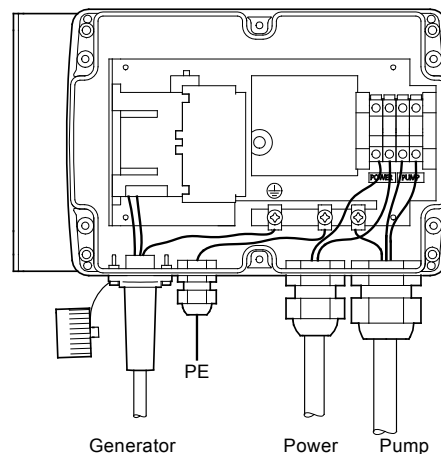

TM02 4162 5001

**Fig. 26** Electrical connections, IO 101

## IO 102 SQFlex breaker box


The IO 102 is designed specifically for wind-powered SQFlex systems.

The IO 102 enables manual starting and stopping of the pump in an SQFlex Wind system or an SQFlex Combi system.

The on/off switch has a built-in "electrical brake" for the turbine. When the switch is in "off" position, the turbine stops or slows down.

The IO 102 rectifies the three-phase AC voltage from the wind turbine into DC voltage. Furthermore, the IO 102 enables the combination of wind energy from the wind turbine and solar energy from the solar panels.


The IO 102 functions as a connection box joining all necessary cables.

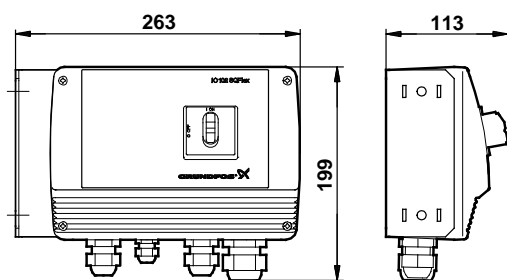

Dimensions stated in mm.

TM02 4232 4003

Fig. 27 Dimensions, IO 102

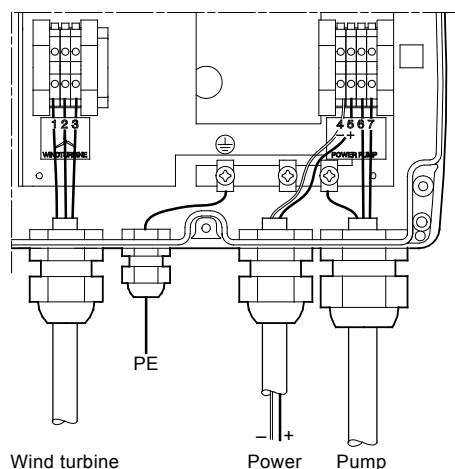

TM02 4312 0502

Fig. 28 Electrical connections, IO 102

## Charge controller

The charge controller is used when a battery backup system is installed with an SQFlex pumping system. These systems are typically used in applications where the pump is not running during most of the peak sun hours of the day, or where it is impossible or impractical to store large volumes of water.

Examples include remote homes or cabins, automatic livestock waterers and very low-yielding wells.

The charge controller is a fully automatic battery charger, and the only setting required is the selection of battery type.

There are three battery types available:

- gel battery
- sealed battery
- flooded battery.

The charge controller enables manual disconnection of the pump, the solar modules or both at the same time.

## Wind turbine

The wind turbine should have a working voltage range of 30 to maximum 220 VAC, single- or three-phase.

The IO 102 functions as a breaker box and must be included in SQFlex Wind systems.

**Note:** The IO 102 must be ordered separately.

## Generator

The generator can be either diesel- or petrol-driven.

The generator must be running steadily before the pump is cut in.

## 5. System sizing

### Sizing of SQFlex system

Grundfos has developed a PC-based sizing tool enabling the sizing of SQFlex systems.

The sizing tool is integrated in Grundfos WebCAPS and WinCAPS and covers both solar- and wind-powered systems.

The following three parameters must be known for the sizing of the optimum SQFlex system:

- installation location
- maximum head required
- quantity of water required.

With a view to the sizing of a correct solar-powered SQFlex system, the world has been divided into six regions:

- North America
- South America
- Australia, New Zealand
- Asia, Pacific
- Southern Africa
- Europe, Middle East, Northern Africa.


Each region is divided into a number of zones according to the solar radiation in kWh/m<sup>2</sup> per day.

SQF 0.6-2

SQF 0.6-3


## 6. Performance curves

### SQF 0.6-2

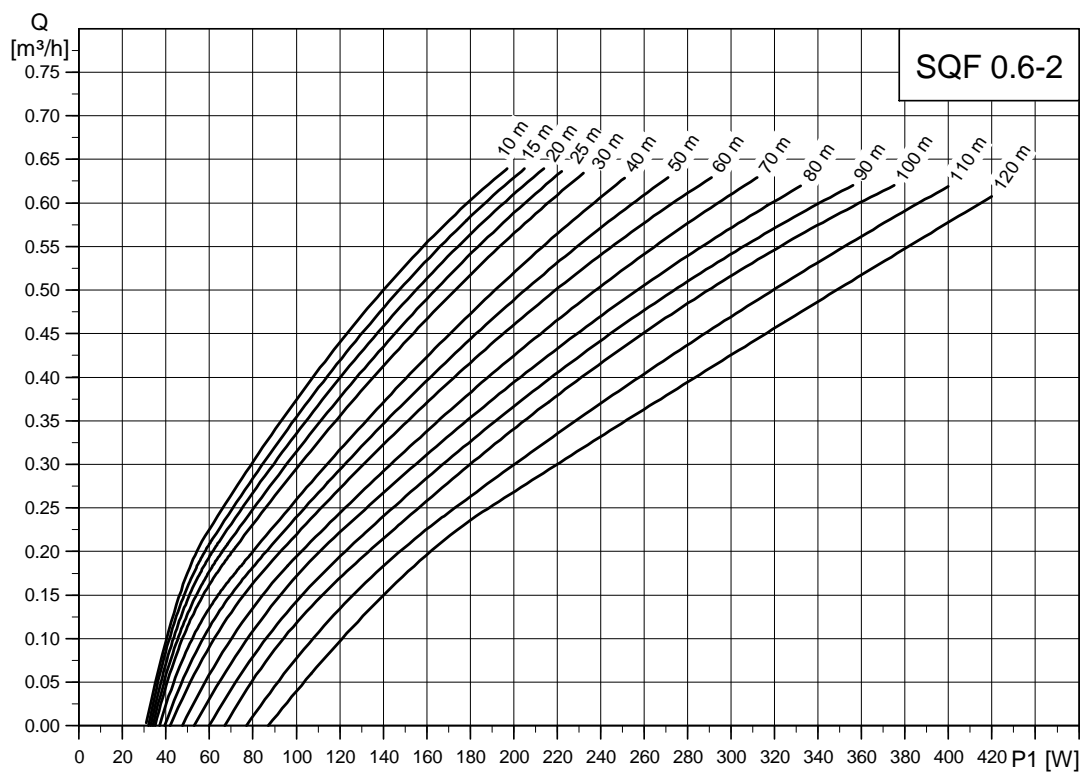

TM02 2338 4107


### SQF 0.6-3

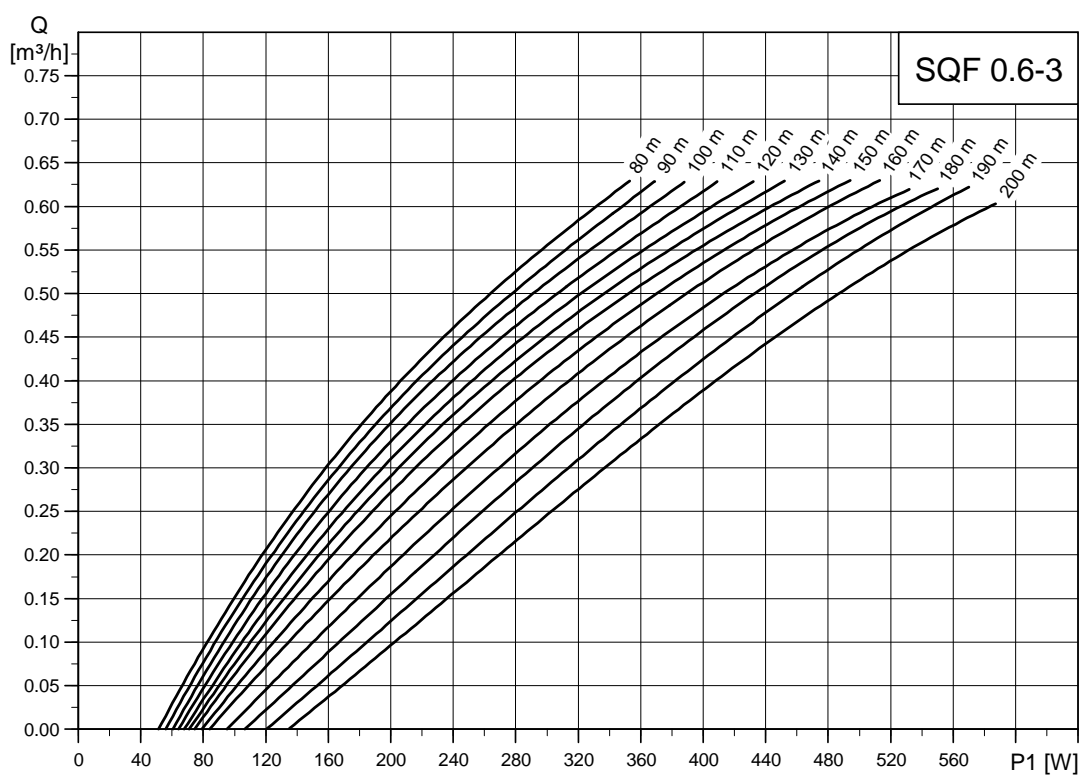

TM03 3926 4107




## SQF 1.2-2

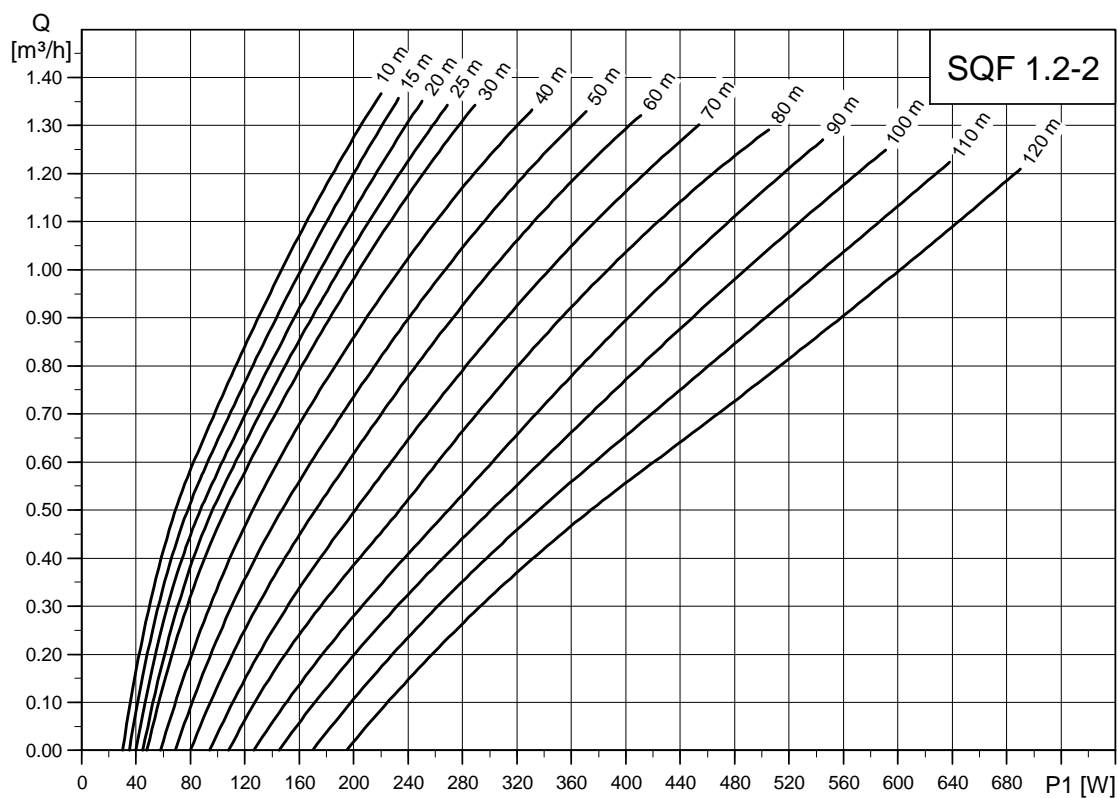

TM02 2339 4107

## SQF 1.2-3

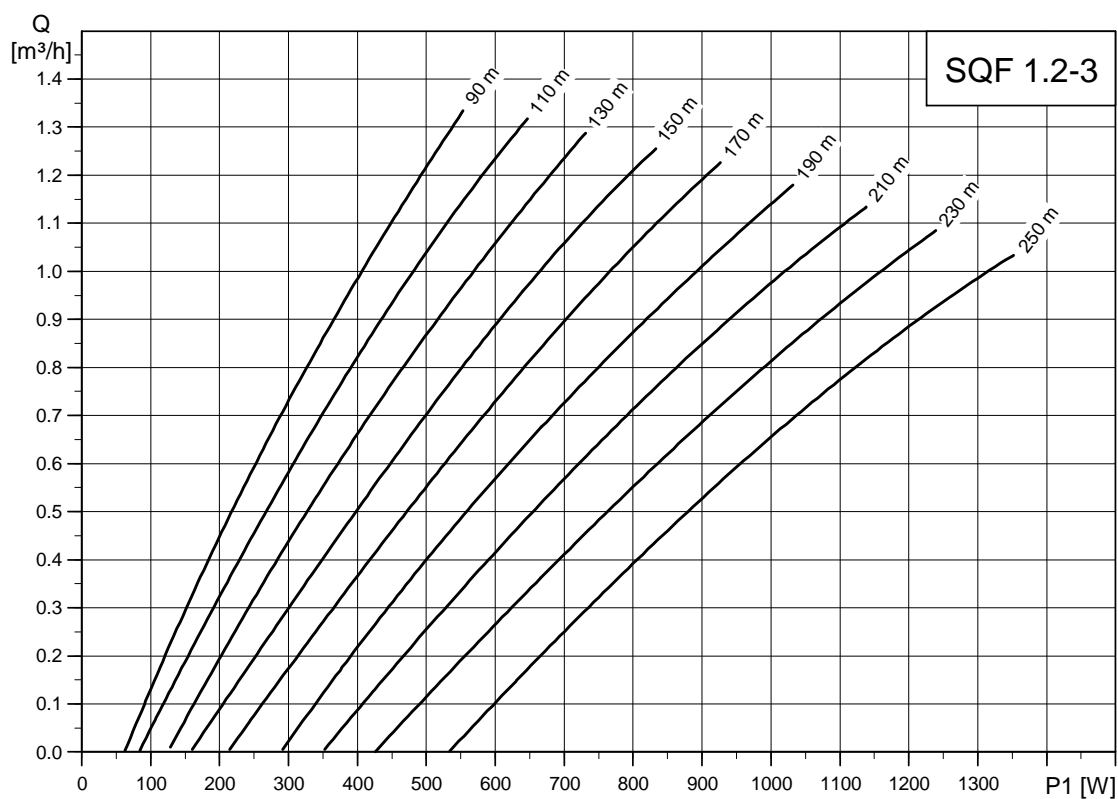


TM04 4606 1709

SQF 2.5-2


SQF 3A-10

## SQF 2.5-2

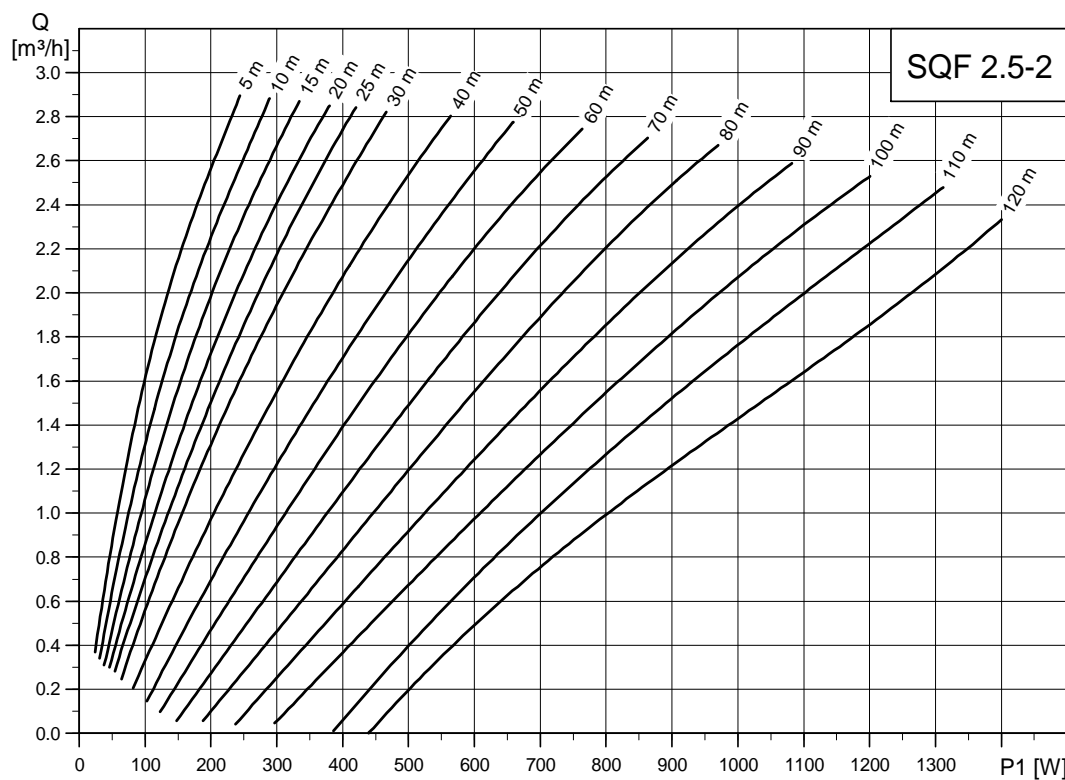


TM02 2340 2409

## SQF 3A-10

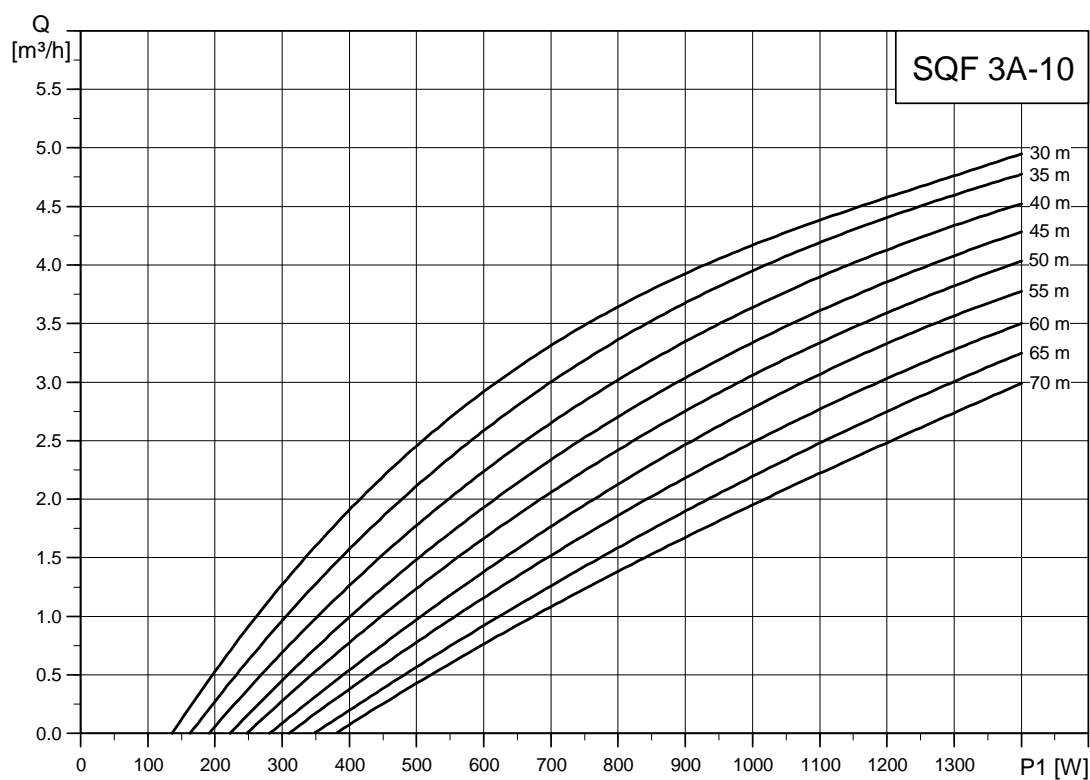


TM03 3927 1206

## SQF 5A-3

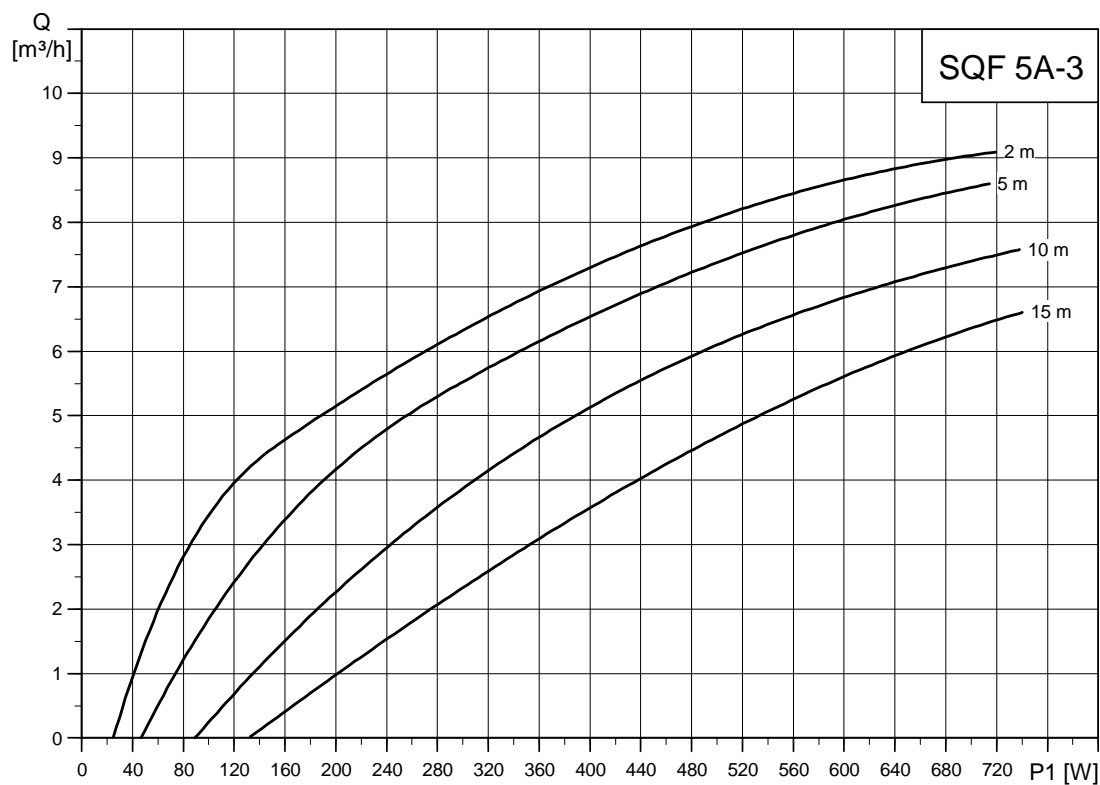

TM02 2341 4 107

## SQF 5A-7

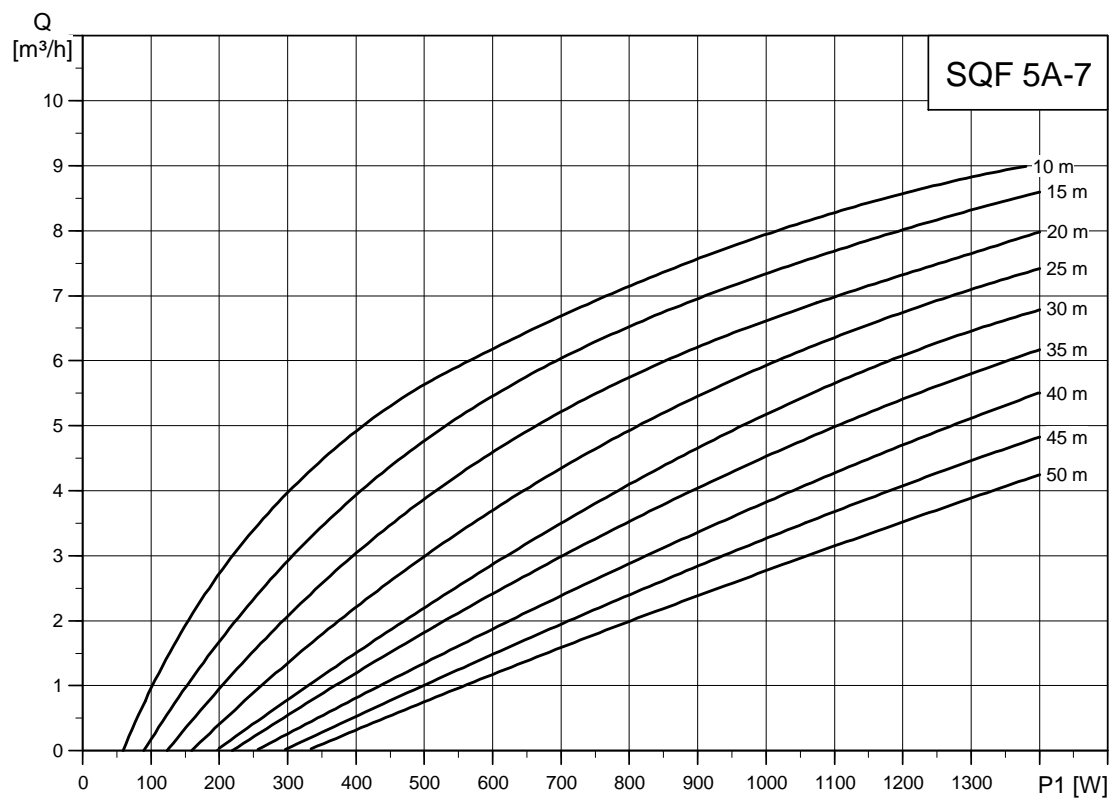


TM02 2342 4 107

SQF 8A-3


SQF 8A-5

## SQF 8A-3

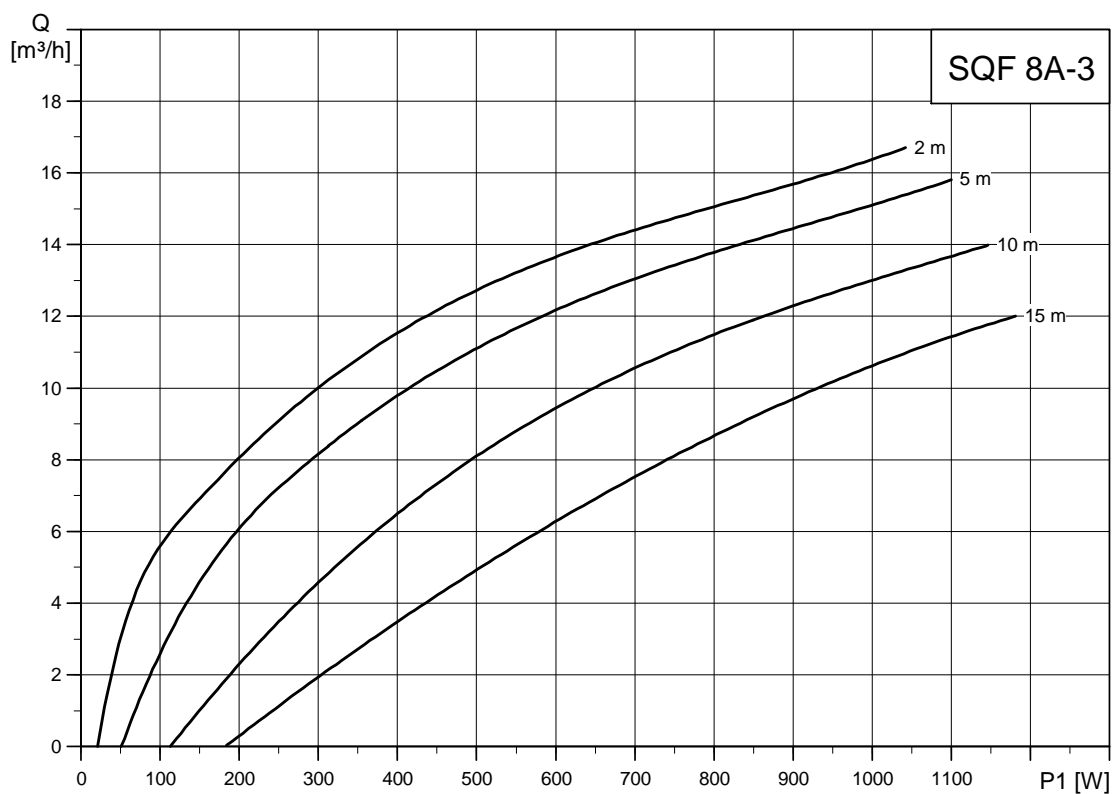


TM02 2343 5006

## SQF 8A-5

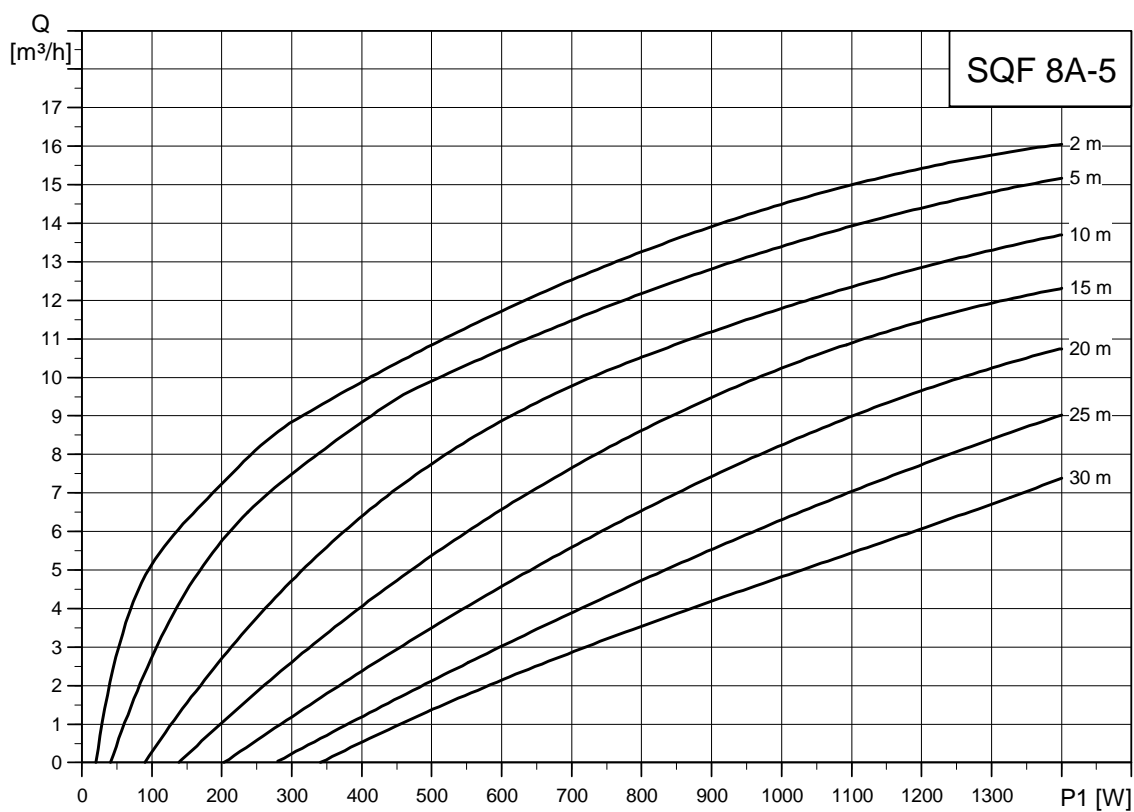

TM03 3928 1206

## SQF 11A-3

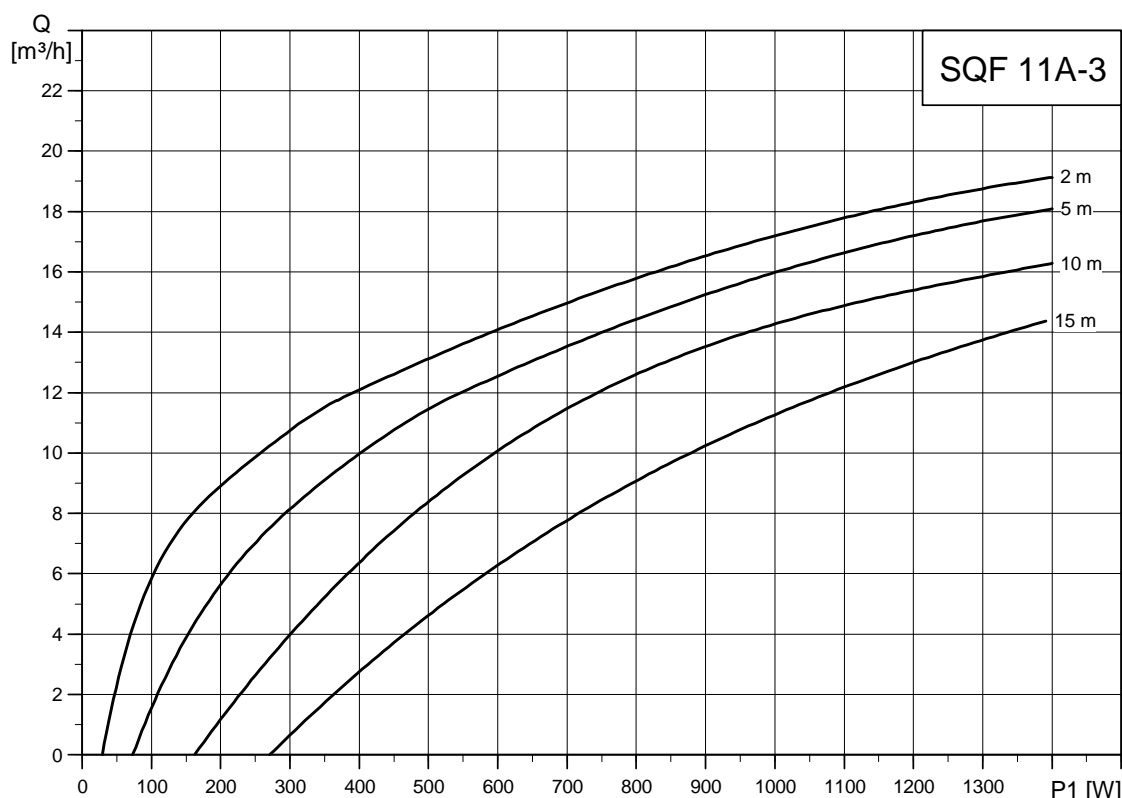

TM03 3929 1206

### EuP ready

The SQFlex centrifugal pumps (SP A) are energy-optimised and complies with EuP Directive (Commission Regulation (EC) No 547/2012) which took effect on 1 January 2013. As from this date all pumps are classified/graduated in a new energy efficiency index (MEI).



### MEI index

Minimum Efficiency Index (MEI) means the dimensionless scale unit for hydraulic pump efficiency at best efficiency point (BEP), part load (PL) and overload (OL). Regulation in EU sets efficiency requirements to  $\text{MEI} > 0.1$  as from 1 January 2013 and  $\text{MEI} > 0.4$  as from 1 January 2015. An indicative benchmark for the best-performing water pumps available on the market in 2012 is  $\text{MEI} \geq 0.70$ .


### Efficiency and MEI index for SQFlex centrifugal (SP A) pumps

Pump type	Pump size	Efficiency [%]	MEI
SQF3A-10	4"	58	$\geq 0.80$
SQF5A-3	4"	60	$\geq 0.56$
SQF5A-7	4"	60	$\geq 0.56$
SQF8A-3	4"	61	$\geq 0.14$
SQF8A-5	4"	61	$\geq 0.14$
SQF11A-3	4"	60	$\geq 0.10$

For more information about the new energy directive, please visit [energy.grundfos.com](http://energy.grundfos.com).

## 7. Technical data

### Dimensions and weights

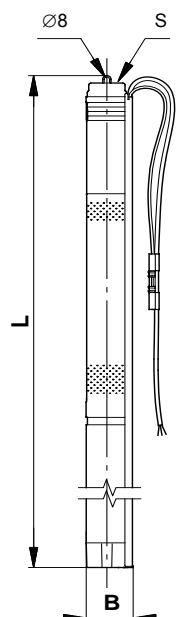

TM02 2209 3901

Pump type	Dimensions [mm]			Net weight [kg]*	Gross weight [kg]*	Shipping volume [m <sup>3</sup> ]*
	L	B	S			
SQF 0.6-2	1185*	74	Rp 1 1/4	7.6	9.4	0.0242
SQF 0.6-2 N	1185*	74	Rp 1 1/4	7.6	9.4	0.0242
SQF 0.6-3	1235*	74	Rp 1 1/4	7.9	9.7	0.0242
SQF 0.6-3 N	1235*	74	Rp 1 1/4	7.9	9.7	0.0242
SQF 1.2-2	1225*	74	Rp 1 1/4	7.9	9.7	0.0242
SQF 1.2-2 N	1225*	74	Rp 1 1/4	7.9	9.7	0.0242
SQF 1.2-3	1295*	74	Rp 1 1/4	8.2	10.0	0.0242
SQF 1.2-3 N	1295*	74	Rp 1 1/4	8.2	10.0	0.0242
SQF 2.5-2	1247*	74	Rp 1 1/4	8.2	10.0	0.0242
SQF 2.5-2 N	1247*	74	Rp 1 1/4	8.2	10.0	0.0242
SQF 3A-10	968	101	Rp 1 1/4	9.5	11.0	0.0282
SQF 3A-10 N	1012	101	Rp 1 1/4	11.1	12.6	0.0282
SQF 5A-3	821	101	Rp 1 1/2	8.1	9.6	0.0282
SQF 5A-3 N	865	101	Rp 1 1/2	9.3	10.8	0.0282
SQF 5A-7	905	101	Rp 1 1/2	8.8	10.3	0.0282
SQF 5A-7 N	949	101	Rp 1 1/2	10.2	11.7	0.0282
SQF 8A-3	927	101	Rp 2	9.5	11.0	0.0282
SQF 8A-3 N	927	101	Rp 2	9.5	11.0	0.0282
SQF 8A-5	1011	101	Rp 2	10.5	12.0	0.0282
SQF 8A-5 N	1011	101	Rp 2	10.5	12.0	0.0282
SQF 11A-3	982	101	Rp 2	10.9	12.4	0.0282
SQF 11A-3 N	982	101	Rp 2	10.9	12.4	0.0282

\* Pump complete

### Electrical data

30-300 VDC or 1 x 90-240 VAC, 50/60 Hz

Pump type	Motor type	Maximum power input P <sub>1</sub> [W]	Maximum current [A]
SQF 0.6-2 (N)	MSF 3 (N)	1400	8.4
SQF 0.6-3 (N)	MSF 3 (N)	1400	8.4
SQF 1.2-2 (N)	MSF 3 (N)	1400	8.4
SQF 1.2-3 (N)	MSF 3 (N)	1400	8.4
SQF 2.5-2 (N)	MSF 3 (N)	1400	8.4
SQF 3A-10 (N)	MSF 3 (N)	1400	8.4
SQF 5A-3 (N)	MSF 3 (N)	1400	8.4
SQF 5A-7 (N)	MSF 3 (N)	1400	8.4
SQF 8A-3 (N)	MSF 3 (N)	1400	8.4
SQF 8A-5 (N)	MSF 3 (N)	1400	8.4
SQF 11A-3 (N)	MSF 3 (N)	1400	8.4



## SQF pump

<b>Power supply to pump</b>	30-300 VDC, PE. 1 x 90-240 V - 10 %/+ 6 %, 50/60 Hz, PE.
<b>Power consumption</b>	Max. 1400 W.
<b>Current consumption</b>	Max. 8.4 A.
<b>Run-up time</b>	Depends on the energy source.
<b>Start/stop</b>	No limitation to the number of starts/stops per hour.
<b>Enclosure class</b>	IP68.
<b>Motor protection</b>	Built into the pump. Protection against <ul style="list-style-type: none"> <li>• dry running by means of a water level electrode</li> <li>• overvoltage and undervoltage</li> <li>• overload</li> <li>• overtemperature.</li> </ul>
<b>Conductivity</b>	≥ 70 µs/cm (micro siemens).
<b>Sound pressure level</b>	The sound pressure level of the pump is lower than the limiting values stated in the EC Machinery Directive.
<b>Radio noise</b>	The SQF complies with the EMC Directive 89/336/EEC. Tested according to the standards EN 61000-6-2 and EN 61000-6-3.
<b>Reset function</b>	The SQF can be reset via the CU 200 or by disconnecting the power supply for 1 minute.
<b>Power factor</b>	PF = 1.
<b>Operation via generator</b>	Voltage: 230 VAC - 10 %/+ 6 %. The generator output must be minimum 1.55 kVA.
<b>Earth-leakage circuit breaker</b>	If the pump is connected to an electric installation where an earth-leakage circuit breaker (ELCB) is used as an additional protection, this circuit breaker must trip out when earth fault currents with DC content (pulsating DC) occur.
<b>Borehole diameter</b>	SQF 0.6, SQF 1.2, SQF 2.5: Minimum: 76 mm. SQF 3A, SQF 5A, SQF 8A, SQF 11A. Minimum: 104 mm.
<b>Installation depth</b>	Minimum: The pump must be completely submerged in the pumped liquid. Maximum: 150 m below the static water table (15 bar).
<b>Suction strainer</b>	Holes of the suction strainer: SQF 0.6 (N), SQF 1.2 (N), SQF 2.5 (N): Ø2.3. SQF 3A (N), SQF 5A: Ø2.5. SQF 5A N, SQF 8A (N), SQF 11A (N): 4 x 20 mm.
<b>Pumped liquids</b>	pH 5 to 9. Sand content up to 50 g/m <sup>3</sup> .
<b>Marking</b>	CE.

## CU 200 SQFlex control unit

<b>Voltage</b>	30-300 VDC, 8.4 A. 90-240 VAC, 8.4 A.
<b>Power consumption</b>	5 W.
<b>Current consumption</b>	Max. 130 mA.
<b>Pump cable</b>	Max. length between the CU 200 and the pump: 300 m. Max. length between the CU 200 and the level switch: 500 m.
<b>Backup fuse</b>	Maximum 10 A.
<b>Radio noise</b>	The CU 200 complies with the EMC Directive 89/336/EEC. Tested according to the standards EN 55014 and EN 55014-2.
<b>Relative air humidity</b>	95 %.
<b>Enclosure class</b>	IP55.
<b>Ambient temperature</b>	During operation: -30 °C to +50 °C. During storage: -30 °C to +60 °C.
<b>Marking</b>	CE.
<b>Weight</b>	2 kg.

## CIU 273 SQFlex GRM control unit

Electrical data	
Supply voltage	24-240 VAC/VDC - 10 %/+ 15 %.
Transient overvoltage	Category II.
Frequency	0-60 Hz.
Power consumption	Max. 11 W.
Cable size	IEC: 0.2 - 4 mm <sup>2</sup> . UL: 24-12 AWG.
Recommended cable type	Screened, double twisted-pair. Cross-section: 0.25 - 1 mm <sup>2</sup> . AWG: 24-18. Max. cable length: 1200 m/4000 feet.
Cable entry	6 x M16 Ø4-10.
GENIbus connection	
Transceiver	RS-485.
Protocol	GENIbus.
Transmission speed	9600 bits/s.
Environmental conditions	
Altitude above sea level	Max. 2000 m.
Relative air humidity	Max. 100 %.
External pollution degree	Category 3.
Enclosure class	IP54 according to IEC 60529. Type 3R according to UL 50.
<b>Ambient temperature</b> <ul style="list-style-type: none"> <li>During operation <ul style="list-style-type: none"> <li>CIU XXX <ul style="list-style-type: none"> <li>-20 °C to +45 °C (-4 °F to +113 °F).</li> </ul> </li> <li>CIU 250-299 <ul style="list-style-type: none"> <li>0 °C to +40 °C (32 °F to +104 °F) (when battery is installed).</li> </ul> </li> </ul> </li> <li>During storage <ul style="list-style-type: none"> <li>CIU XXX <ul style="list-style-type: none"> <li>-20 °C to +60 °C (-4 °F to +140 °F).</li> </ul> </li> <li>CIU 250-299 <ul style="list-style-type: none"> <li>-20 °C to +35 °C (-4 °F to +95 °F) (when battery is installed).</li> </ul> </li> </ul> </li> <li>During transportation <ul style="list-style-type: none"> <li>CIU XXX <ul style="list-style-type: none"> <li>-20 °C to +60 °C (-4 °F to +140 °F).</li> </ul> </li> <li>CIU 250-299 <ul style="list-style-type: none"> <li>-20 °C to +35 °C (-4 °F to +95 °F) (when battery is installed).</li> </ul> </li> </ul> </li> </ul>	

## IO 50 SQFlex switch box

Voltage	Max. 300 VDC, 8.4 A. Max. 265 VAC, 8.4 A.
Enclosure class	IP55.
Ambient temperature	During operation: -30 °C to +50 °C. During storage: -30 °C to +60 °C.
Marking	CE.

## IO 101 SQFlex switch box

Voltage	230 VAC - 15 %/+ 10 %, 50/60 Hz (internal relay). Max. 225 VDC, 8.4 A. Max. 255 VAC, 8.4 A.
	115 VAC - 15 %/+ 10 %, 50/60 Hz (internal relay). Max. 225 VDC, 8.4 A. Max. 125 VAC, 8.4 A.
Enclosure class	IP55.
Ambient temperature	During operation: -30 °C to +50 °C. During storage: -30 °C to +60 °C.
Marking	CE.

## IO 102 SQFlex breaker box

<b>Voltage</b>	Max. 225 VDC, 8.4 A. Max. 265 VAC, 8.4 A.
<b>Enclosure class</b>	IP55.
<b>Ambient temperature</b>	During operation: -30 °C to +50 °C. During storage: -30 °C to +60 °C.
<b>Marking</b>	CE.

## Charge controller

<b>Voltage (solar input)</b>	Max. 110 VDC.
<b>Current (solar input)</b>	Max. 15 A.
<b>Output current (load)</b>	Max. 15 A.
<b>Ambient temperature</b>	-40 °C to +60 °C.
<b>Weight</b>	0.34 kg.

## Material specification, helical rotor pump

Pos.	Component	Material	SQF		SQF-N	
			EN/ DIN	AISI	EN/ DIN	AISI
1	Valve casing	Polyamide				
1a	Discharge chamber	Stainless steel	1.4301	304	1.4401	316
1d	O-ring	NBR				
2	Valve cup	Polyamide				
3	Valve seat	Silicone (LSR)				
6	Flange, upper	Stainless steel	1.4401	316	1.4401	316
7a	Retaining ring	Stainless spring steel	1.4301	304	1.4401	316
9	Pump stator	Stainless steel/EPDM	1.4301	304	1.4401	316
13	Pump rotor	Stainless steel	1.4401	316	1.4401	316
16	Torsion shaft	Stainless steel	1.4401	316	1.4401	316
39	Valve spring	Stainless spring steel	1.4310	310	1.4401	316
55	Sleeve	Stainless steel	1.4301	304	1.4401	316
70	Valve guide	Polyamide				
159c	Sand slinger	NBR				
	Cable guard	Stainless steel	1.4301	304	1.4401	316
	Screws for cable guard	Stainless steel	1.4401	316	1.4401	316

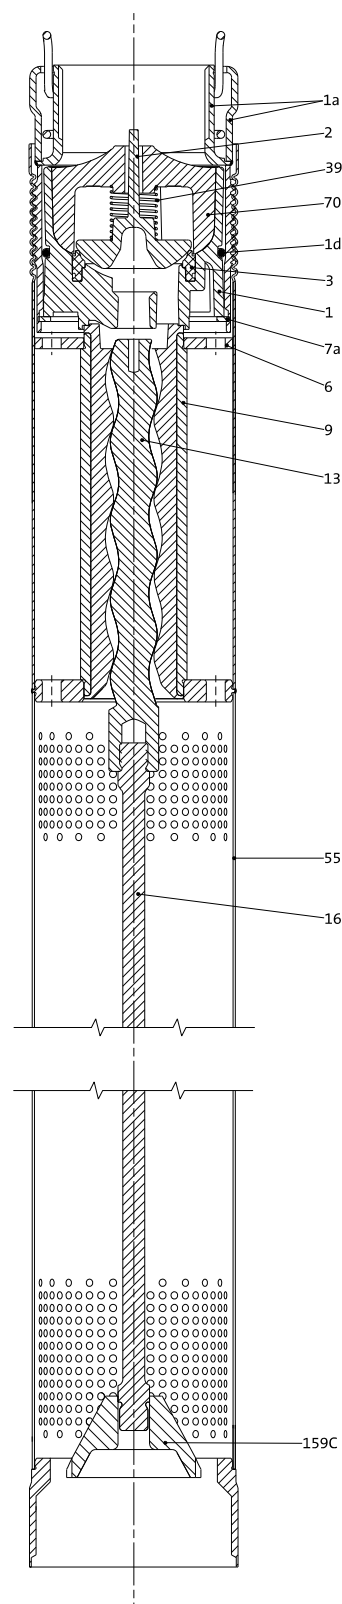


Fig. 29 Example: SQF 1.2-2

TM02 2213 2712

## Material specification, centrifugal pump

Pos.	Component	Material	SQF		SQF-N	
			EN/ DIN	AISI	EN/ DIN	AISI
1	Valve casing	Stainless steel	1.4301	304	1.4401	316
4	Chamber, top	Stainless steel	1.4301	304	1.4401	316
6	Top bearing	NBR				
7	Neck ring	NBR/PPS				
8	Bearing	NBR				
9	Chamber, complete	Stainless steel	1.4301	304	1.4401	316
11	Nut for split cone	Stainless steel	1.4301	304	1.4401	316
12	Split cone	Stainless steel	1.4301	304	1.4401	316
13	Impeller	Stainless steel	1.4301	304	1.4401	316
14	Inlet part	Stainless steel	1.4301	304	1.4401	316
14a	Connecting piece, complete (MSF 3 adapter)	Stainless steel	1.4301	304	1.4401	316
15	Strainer	Stainless steel	1.4301	304	1.4401	316
16	Shaft, cylindrical	Stainless steel	1.4057	431	1.4460	329
17	Strap	Stainless steel	1.4301	304	1.4401	316
18	Cable guard, pump	Stainless steel	1.4301	304	1.4401	316
18c	Cable guard, motor	Stainless steel	1.4301	304	1.4401	316
19	Nut for strap	Stainless steel	1.4301	304	1.4401	316
19a	Nut	Stainless steel	1.4401	316	1.4401	316
24	Coupling with nut	Stainless steel	1.4462	329	1.4462	329
24a	Supporting ring	Stainless steel	1.4401	316	1.4401	316
24b	Spline protector	NBR				
25	Retainer for neck ring, complete	Stainless steel	1.4301	304	1.4401	316
85	Stop ring (only SQF 5A and SQF 11A)	Carbon/graphite PTFE				
159c	Sand slinger	NBR				
	Screws for cable guard	Stainless steel	1.4401	316	1.4401	316

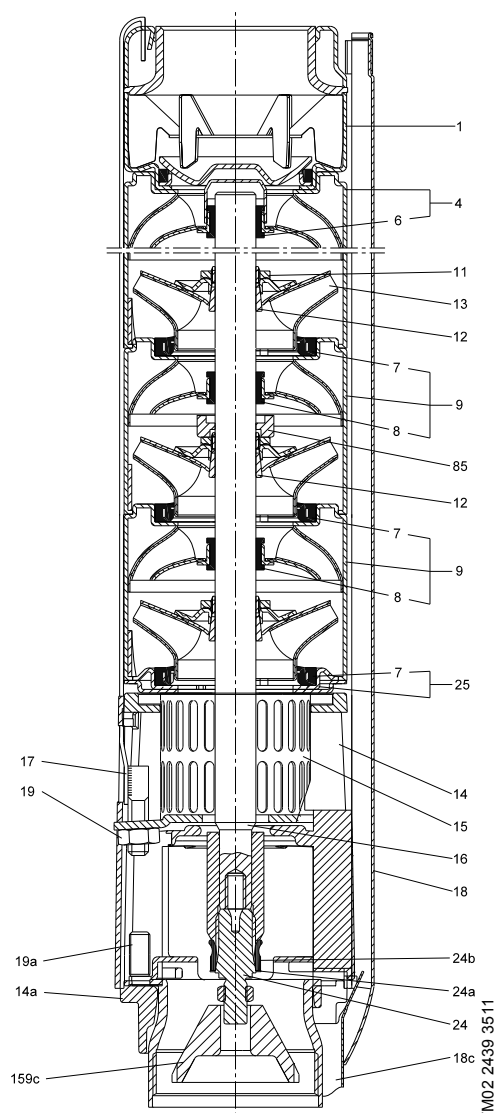


Fig. 30 Example: SQF 11A-3

TM02 2439 3511

## Material specification, motor

Pos.	Component	Material	MSF 3		MSF 3 N	
			EN/DIN	AISI	EN/DIN	AISI
201	Stator with sleeve, complete	Stainless steel	1.4301	304	1.4401	316
202	Rotor	Stainless steel	1.4301	304	1.4401	316
202a	Stop ring	PP				
202c	Shaft end	Stainless steel	1.4401	316	1.4401	316
203	Thrust bearing, stationary	Stainless steel/carbon	1.4401	316	1.4401	316
205	Bearing plate with radial bearing	Silicon carbide	1.4301	304	1.4401	316
206	Thrust bearing, rotating	Stainless steel/ aluminium oxide $Al_2O_3$	1.4401	316	1.4401	316
220	Motor cable with plug					
222a	Filling plug	Silicone (LSR)				
223	Electronic unit					
224	O-ring	NBR				
225	Top cover	PPS				
232	Shaft seal	NBR				
243	Thrust-bearing housing	Stainless steel	1.4408	316	1.4408	316
	Four screws (M4)	Stainless steel	1.4401	316	1.4401	316


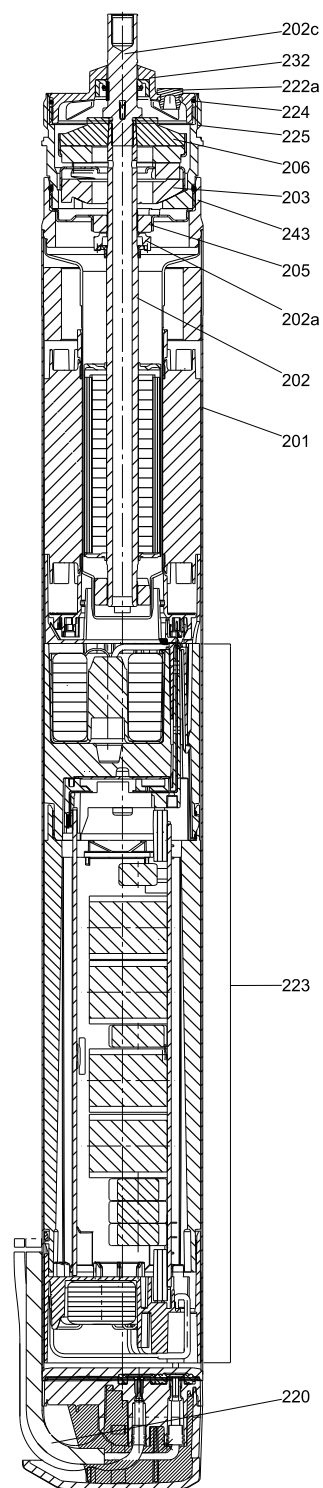


Fig. 31 MSF 3

TM02 2215 2911

## 8. Product numbers

### SQF submersible pump

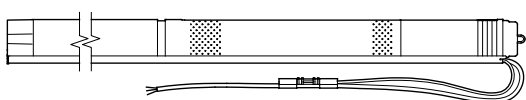

TM02 2217 3901

Fig. 32 SQF pump

The SQF pump complete is supplied with 2 m cable.

Pump type	Pump size	Product number	
		SQF	SQF-N
SQF 0.6-2 (N)	3"	95027324	95027325
SQF 0.6-3 (N)	3"	95027326	95027327
SQF 1.2-2 (N)	3"	95027328	95027329
SQF 1.2-3 (N)	3"	96834838	96834839
SQF 2.5-2 (N)	3"	95027330	95027331
SQF 3A-10 (N)	4"	95027336	95027337
SQF 5A-3 (N)	4"	95027338	95027339
SQF 5A-7 (N)	4"	95027342	95027343
SQF 8A-3 (N)	4"	95027344	95027345
SQF 8A-5 (N)	4"	95027346	95027347
SQF 11A-3 (N)	4"	95027441	95027442

### CU 200 SQFlex control unit

Product	Product number
CU 200 SQFlex	96625360

### CIU 273 SQFlex GRM control unit

Product	Product number
CIU 273 SQFlex	97980341
Antenna, roof mounting, complete	97631956
Antenna, desk mounting, complete	97631957

### IO 50 SQFlex switch box

Product	Product number
IO 50 SQFlex, metric	97907253
IO 50 SQFlex, US	96959028

### IO 101 SQFlex switch box

Product	Product number
IO 101 SQFlex, 230 V	96475074
IO 101 SQFlex, 115 V	96481502

### IO 102 SQFlex breaker box

Product	Product number
IO 102 SQFlex for wind turbine	96475065

### Charge controller

Product	Product number
Charge controller	96023194

### Submersible drop cables

The submersible drop cables for SQF pumps are approved for use with potable water (KTW-approved). The cables are made of EPR (ethylene-propylene rubber).

#### Sizing of cable

Use the following formula:

$$L = \frac{\Delta P \times q \times V_{mp}^2}{Wp \times 100 \times 2 \times \rho} [m]$$

L = length of cable [m]

$\Delta P$  = power loss [%]

q = cross-section of submersible drop cable [mm<sup>2</sup>]

$V_{mp}$  = maximum power voltage [V]

Wp = Watt peak [Wp]

$\rho$  = specific resistance: 0.0173 [ $\Omega$  mm<sup>2</sup>/m].

The sizing tool in Grundfos WebCAPS and WinCAPS makes it possible to calculate the exact losses.

## 9. Accessories

### Flow sleeve for SQFlex 3" standard version (EN 1.4301/AISI 304)

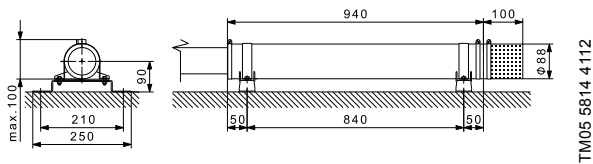


Fig. 33 SQFlex 3" flow sleeve and strainer

Product	Material	Product number
Flow sleeve complete (including strainer and supporting brackets)	Stainless steel EN 1.4301	98253259
Flow sleeve	Stainless steel EN 1.4301	98253254
Strainer	Stainless steel EN 1.4301	97943446
Supporting brackets	Stainless steel EN 1.4301	97512995

### Flow sleeve for SQFlex 4" standard version (EN 1.4301/AISI 304)

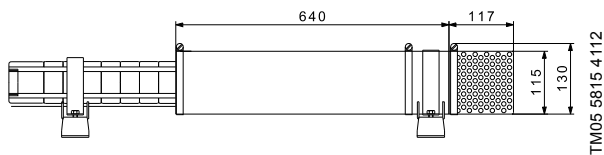


Fig. 34 SQFlex 4" flow sleeve and strainer

Product	Material	Product number
Flow sleeve complete (including strainer and supporting brackets)	Stainless steel EN 1.4301	98255476
Flow sleeve	Stainless steel EN 1.4301	98255472
Strainer	Stainless steel EN 1.4301	97942211
Supporting brackets	Stainless steel EN 1.4301	96957450



## Grease

Description	Product number
Grease for lubrication of motor shaft	96037562

## Level switch




TM02 2407 4201

Description	Product number
Level switch	010748

High water level: Contact is closed.  
Low water level: Contact is open.

## Pressure switch



TM02 2406 1806

Description	Product number
Pressure switch	ID8952

## Anemometer



GR 7667

Description	Product number
<p>The anemometer enables these measurements:</p> <ul style="list-style-type: none"> <li>• wind speed (in m/s, knots, mph or Beaufort)</li> <li>• average wind speed (in m/s, knots, mph or Beaufort)</li> <li>• temperature in degrees Celsius [°C] or Fahrenheit [°F]</li> <li>• chill factor.</li> </ul> <p>The anemometer is waterproof down to 10 metres and programmable.</p>	96496685

Dimensions: 10 x 4 x 1 cm  
Weight: 42 g


## Submersible drop cable



TM00 7882 2296

Description	Version	Diameter [mm]	Product number
3-core cable, including earth conductor. KTW-approved. When ordering, please state length [m].	3G 1.5 mm <sup>2</sup> (round)	9.6 - 12.5	ID7946
	3G 2.5 mm <sup>2</sup> (round)	11.5 - 14.5	ID7947
	3G 4.0 mm <sup>2</sup> (round)	13.0 - 16.0	ID7948
	3G 6.0 mm <sup>2</sup> (round)	14.5 - 20.0	RM4098
	3G x 1.5 mm <sup>2</sup> (flat)	6.5 - 13.2	RM3952

## Cable termination kit, type KM

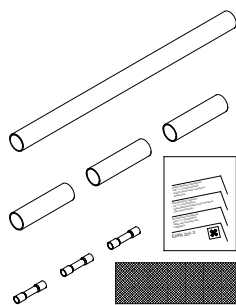

TM00 3838 1294

Description	Cross-section of conductors [mm <sup>2</sup> ]	Product number
For watertight shrink-joining of motor cable and submersible drop cable (round or flat cable).		
Enables the joining of <ul style="list-style-type: none"> <li>cables of equal size</li> <li>cables of different size</li> <li>cable with single leads.</li> </ul>	1.5 - 6.0	96021473
The joint is ready for use after a few minutes and requires no long hardening time as do resin joints.		
The joint cannot be separated.		

## Cable clips



TM00 7897 2296

Description	Dimensions [m]	Product number
For fastening of cable and straining wire to the riser pipe. The clips should be fitted every 3 metres. One set for approx. 45 m riser pipe.	Length: 7.5 16 buttons	115016

## Straining wire



TM00 7897 2296

Description	Diameter [mm]	Product number
Stainless steel DIN W.-Nr. 1.4401. Retains the submersible pump. When ordering, please state length [m].	2	ID8957


## Wire clamp



TM00 7898 2296

Description	Material	Product number
Two clamps per loop	Stainless steel DIN W.-Nr. 1.4401	ID8960

## Zinc anodes



TM01 4430 0199


Description	Product number
For additional protection, e.g. if the Cl <sup>-</sup> content exceeds 500 ppm, zinc anodes can be used. Sacrificial anodes are placed on the outside of the pump and motor as protection against corrosion. The number of anodes required depends on the pump and motor in question. Product number includes: 2 x 6 anodes with clips. Diameter when fitted: 125 mm. Minimum borehole diameter: 127 mm (5").	97645697

## Solar cables

Description	Version	Length [m]	Product number
DC cable (12 AWG/3, 3 mm <sup>2</sup> ), UL-approved, for outdoor use. Select connector type MC3 or MC4.	Array to controller (MC3)	10	91126024
	Array to array (MC3)	0.5	91126023
	Array to controller (MC4)	10	98257868
	Array to array (MC4)	0.5	98257892

# 10. Further product information

## WebCAPS

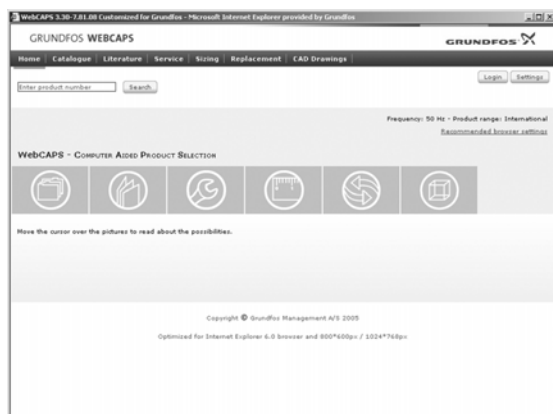


WebCAPS is a **Web-based Computer Aided Product Selection** program available on [www.grundfos.com](http://www.grundfos.com).

WebCAPS contains detailed information on more than 220,000 Grundfos products in more than 30 languages.

Information in WebCAPS is divided into six sections:


- Catalogue
- Literature
- Service
- Sizing
- Replacement
- CAD drawings.

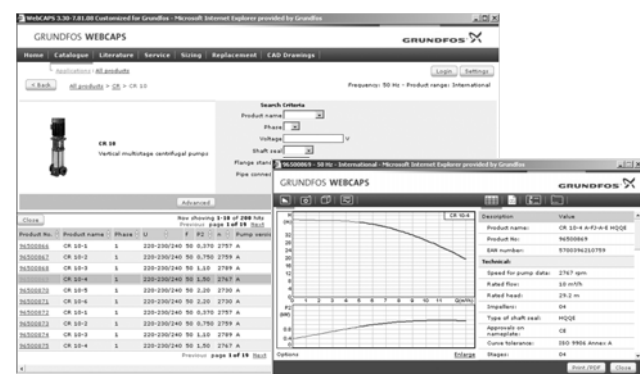

### Catalogue

Based on fields of application and pump types, this section contains the following:


- technical data
- curves (QH, Eta, P1, P2, etc.) which can be adapted to the density and viscosity of the pumped liquid and show the number of pumps in operation
- product photos
- dimensional drawings
- wiring diagrams
- quotation texts, etc.

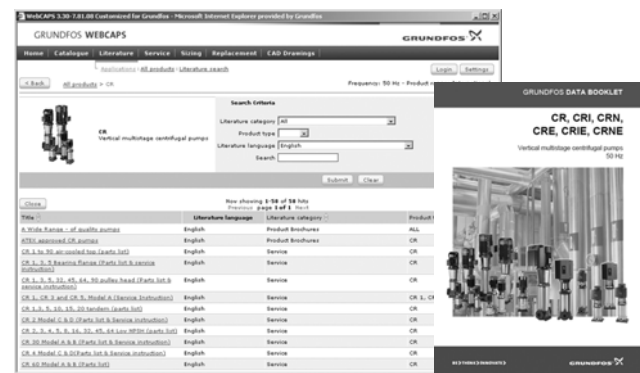

### Literature

This section contains all the latest documents of a given pump, such as

- data booklets
- installation and operating instructions
- service documentation, such as Service kit catalogue and Service kit instructions
- quick guides
- product brochures.

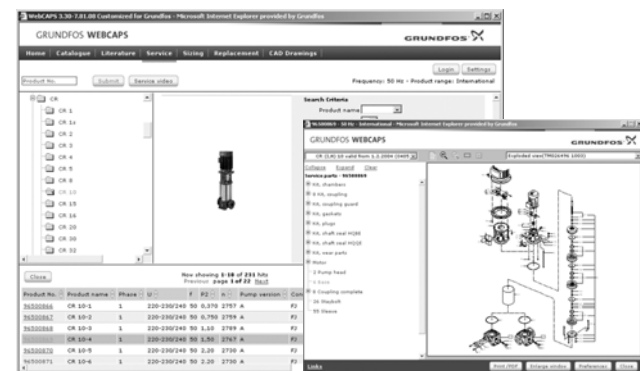

### Service


This section contains an easy-to-use interactive service catalogue. Here you can find and identify service parts of both existing and discontinued Grundfos pumps. Furthermore, the section contains service videos showing you how to replace service parts.



### Sizing

This section is based on different fields of application and installation examples and gives easy step-by-step instructions in how to size a product:

- Select the most suitable and efficient pump for your installation.
- Carry out advanced calculations based on energy, consumption, payback periods, load profiles, life cycle costs, etc.
- Analyse your selected pump via the built-in life cycle cost tool.
- Determine the flow velocity in wastewater applications, etc.

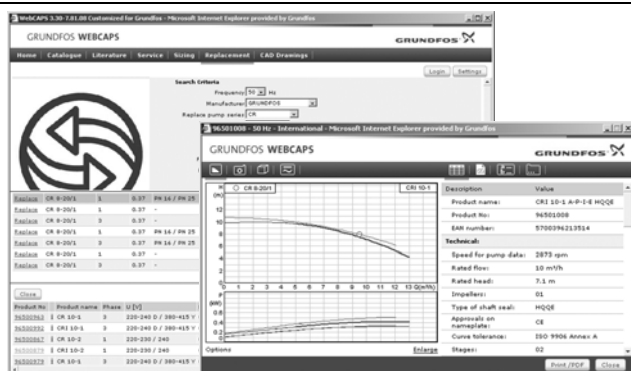


### Replacement

In this section you find a guide to selecting and comparing replacement data of an installed pump in order to replace the pump with a more efficient Grundfos pump.

The section contains replacement data of a wide range of pumps produced by other manufacturers than Grundfos.

Based on an easy step-by-step guide, you can compare Grundfos pumps with the one you have installed on your site. When you have specified the installed pump, the guide will suggest a number of Grundfos pumps which can improve both comfort and efficiency.

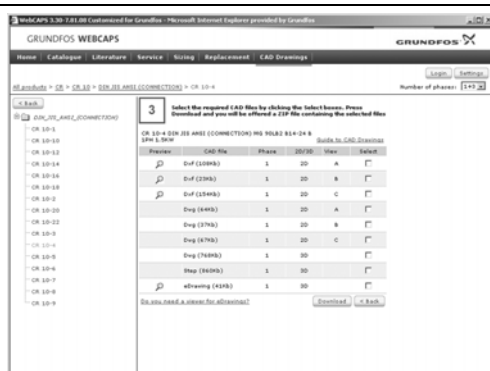

### CAD drawings

In this section, it is possible to download 2-dimensional (2D) and 3-dimensional (3D) CAD drawings of most Grundfos pumps.

These formats are available in WebCAPS:

2-dimensional drawings:

- .dxf, wireframe drawings
- .dwg, wireframe drawings

3-dimensional drawings:

- .dwg, wireframe drawings (without surfaces)
- .stp, solid drawings (with surfaces)
- .eprt, E-drawings



## WinCAPS



Fig. 35 WinCAPS DVD

WinCAPS is a **Windows-based Computer Aided Product Selection** program containing detailed information on more than 220,000 Grundfos products in more than 30 languages.

The program contains the same features and functions as WebCAPS, but is an ideal solution if no internet connection is available.

WinCAPS is available on DVD and updated once a year.

## GO CAPS

Mobile solution for professionals on the GO!



CAPS functionality on the mobile workplace.



Subject to alterations.





96477803 0413

ECM: 1111841

**GRUNDFOS A/S**  
DK-8850 Bjerringbro . Denmark  
Telephone: +45 87 50 14 00  
[www.grundfos.com](http://www.grundfos.com)

**GRUNDFOS** 